

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/319471222>

# Cross-country analysis of faecal sludge dewatering

**Article** in *Environmental Technology* · September 2017

DOI: 10.1080/09593330.2017.1374472

CITATIONS

3

READS

252

**10 authors**, including:



**Moritz Gold**  
ETH Zurich

**9 PUBLICATIONS** **27 CITATIONS**

[SEE PROFILE](#)



**Hidenori Harada**  
Kyoto University

**32 PUBLICATIONS** **166 CITATIONS**

[SEE PROFILE](#)



**Jean-David Therrien**  
Laval University

**1 PUBLICATION** **3 CITATIONS**

[SEE PROFILE](#)



**Swaib Semiyaga**  
Makerere University

**5 PUBLICATIONS** **61 CITATIONS**

[SEE PROFILE](#)


**Some of the authors of this publication are also working on these related projects:**



Faecal Management Enterprises (FaME) [View project](#)



Study of a sanitation system to complement sewerage to achieve Millennium Development Goals [View project](#)





## Cross-country analysis of faecal sludge dewatering

Moritz Gold , Hidenori Harada , Jean-David Therrien, Takahiro Nishida,  
Michael Cunningham, Swaib Semiyaga, Shigeo Fujii, Caetano Dorea, Viet-  
Anh Nguyen & Linda Strande

To cite this article: Moritz Gold , Hidenori Harada , Jean-David Therrien, Takahiro Nishida,  
Michael Cunningham, Swaib Semiyaga, Shigeo Fujii, Caetano Dorea, Viet-Anh Nguyen & Linda  
Strande (2017): Cross-country analysis of faecal sludge dewatering, Environmental Technology,  
DOI: [10.1080/09593330.2017.1374472](https://doi.org/10.1080/09593330.2017.1374472)

To link to this article: <http://dx.doi.org/10.1080/09593330.2017.1374472>

 View supplementary material [↗](#)

 Accepted author version posted online: 04  
Sep 2017.  
Published online: 12 Sep 2017.

 Submit your article to this journal [↗](#)



 Article views: 4

 View related articles [↗](#)

 View Crossmark data [↗](#)



## Cross-country analysis of faecal sludge dewatering

Moritz Gold <sup>a</sup>, Hidenori Harada <sup>b</sup>, Jean-David Therrien<sup>a,c</sup>, Takahiro Nishida<sup>b</sup>, Michael Cunningham<sup>a</sup>, Swaib Semiyaga<sup>d</sup>, Shigeo Fujii<sup>b</sup>, Caetano Dorea<sup>c</sup>, Viet-Anh Nguyen<sup>e</sup> and Linda Strande<sup>a</sup>

<sup>a</sup>Eawag: Swiss Federal Institute of Aquatic Science and Technology, Sandec: Department of Water, Sanitation and Solid Waste for Development, Duebendorf, Switzerland; <sup>b</sup>Graduate School of Global Environmental Studies, Kyoto University, Kyoto, Japan; <sup>c</sup>Département de génie civil et de génie des eaux, Université Laval, Quebec, Canada; <sup>d</sup>Department of Civil and Environmental Engineering, College of Engineering, Design, Art and Technology, Makerere University, Kampala, Uganda; <sup>e</sup>Institute of Environmental Science and Engineering, Hanoi University of Civil Engineering, Hanoi, Vietnam

### ABSTRACT

Dewatering of faecal sludge (FS) is indispensable for adequate FS management. However, comprehensive knowledge is lacking on FS dewatering performance. This study compared the dewatering performance of FS from different countries and onsite sanitation technologies, to assess influential characteristics on dewatering, and to compare dewatering performance of FS with wastewater sludge. We collected 73 FS samples from septic tanks, lined pit latrines, unlined pit latrines and *johkasou* tanks in Uganda, Vietnam and Japan, and 18 samples of wastewater sludge in Switzerland. Capillary suction time (CST) and total solids (TS) of centrifuged sludge (% TS<sub>final</sub>) were determined as metrics of dewatering rate and dewaterability, respectively, together with relevant sludge characteristics. Data were analysed by bootstrapping comparison of median results of each sample category and by bootstrapping multiple regression analysis to quantify the relative importance of sludge characteristics on dewatering performance. Results showed that the dewatering rate was significantly different between FS from different technologies, whereas dewaterability was significantly different within the same technology. FS had a significantly lower dewatering rate than wastewater sludge. In contrast, FS dewaterability was greater than wastewater sludge. However, this could be attributed to higher concentrations of sand in FS. Electrochemical properties such as NH<sub>4</sub>-N and surface charge had the strongest correlation to dewatering rate, and solid properties such as sand content and total volatile solids to dewaterability. The results identify potential characteristics that could explain and predict the high variability of FS dewatering performance that is observed in the field.

### ARTICLE HISTORY

Received 17 July 2017  
Accepted 21 August 2017

### KEYWORDS

Faecal sludge; dewatering rate; dewaterability; bootstrapping; multiple regression analysis



## Introduction

Worldwide, the sanitation needs of 2.7 billion people are met by onsite sanitation technologies [1,2]. Typically, faecal sludge (FS) from these technologies is inadequately managed. FS is 'the raw or partially digested, semisolid or slurry resulting from collection, storage or treatment of combinations of excreta and blackwater, with or without greywater' that accumulates in onsite sanitation technologies [3,p.1]. For example, in Kampala, Uganda; Dar es Salaam, Tanzania; Dakar, Senegal; Hanoi and Danang, Vietnam; and Nonthaburi, Thailand, sanitation needs of 75–100% people are met by onsite sanitation technologies and 21–82% of excreta is not safely managed [4–9]. This has significant economic, environmental and public health implications [10,11].

In urban areas, FS collected by vacuum trucks typically contains more than 95% water [12–16]. This makes the dewatering of FS indispensable for adequate FS

management. Increased performance of FS dewatering can reduce the amount of FS that needs to be transported, can decrease the required land area or increase the capacities of FS treatment plants and can improve the resource recovery potential of FS treatment products [12,13,17].

In contrast to FS, comprehensive knowledge is available on the dewatering performance of wastewater sludge in relation to sludge characteristics [18–24]. FS dewatering rates are highly variable between cities and onsite sanitation technologies and are less efficient than wastewater sludge [13,25,26]. For example, in Dakar, Senegal, septic tank FS had a lower dewatering rate compared to literature values for water and wastewater sludge [13]; in Accra, Ghana, public toilet FS had a lower dewatering rate than septic tank FS [26]. FS characteristics that influence dewatering rates and dewaterability have not been reported for different

**CONTACT** Hidenori Harada  harada.hidenori.8v@kyoto-u.ac.jp  Graduate School of Global Environmental Studies, Kyoto University, Yoshida-honmachi, Sakyo, Kyoto 606-8501, Japan

 Supplemental data for this article can be accessed at <https://doi.org/10.1080/09593330.2017.1374472>.

© 2017 Informa UK Limited, trading as Taylor & Francis Group

onsite sanitation technologies. Such knowledge could help one to improve the design and operation of FS treatment plants. In addition, comparison of FS dewatering rates and dewaterability with wastewater sludge could aid in the transfer of knowledge and technologies from wastewater sludge to FS treatment.

The objective of this study was to quantify and compare the dewatering performance of FS from different countries and onsite sanitation technologies, to assess the influential sludge characteristics on the dewatering performance and to compare the dewatering performance of FS with that of wastewater sludge.

## Materials and methods

### Sludge sampling

As summarized in Table 1, 73 FS and 18 wastewater sludge samples were collected in Vietnam, Uganda, Japan and Switzerland.

In Uganda, FS samples were collected from 16 lined pit latrines (Lined\_UG), 13 septic tanks (Septic\_UG) and 5 unlined pit latrines (Unlined\_UG) in Kampala. Lined pit latrines are above or below ground, fully lined tanks, with no overflow or infiltration [27]. Unlined pit latrines are fully unlined, or partially lined tanks, and thus allow for groundwater inflow or FS infiltration and septic tanks were below ground, fully lined tanks, with an overflow [28]. Emptying frequencies are highly variable in Kampala, and the average frequency is not known. Lined\_UG and Septic\_UG samples were collected from vacuum trucks during discharge at Bugolobi Sewage Treatment Works, where FS was also treated with sewage. To obtain representative samples from each vacuum truck, approximately 1-L grab samples were collected four times during discharge and then mixed to one composite sample: once at the beginning, twice in the middle and once at the end. Unlined\_UG

samples were collected from manual FS collection service providers during discharge at Bugolobi Sewage Treatment Works. Approximately 8 L of grab samples were collected from the entire FS volume and mixed to one composite sample.

In Vietnam, FS samples were collected from 10 septic tanks of private households (Septic\_VN) and 4 septic tanks of public pay-for-use toilets (Public\_Septic\_VN) in Hanoi. Emptying frequencies have a high variability, with the median interval estimated at 7 years [29]. Public\_Septic\_VN were collected from vacuum trucks discharging at the Cau Dien treatment plant. Septic\_VN were obtained through an access port on the top of vacuum trucks with a core sampler.

In Japan, 16 lined pit latrine (Lined\_JP) and 9 *johkasou* tank (Johkasou\_JP) FS samples were collected. Lined pit latrines in Japan are sealed tanks made out of fiber-reinforced plastics, typically equipped with micro flush toilet pans (200–500 mL/flush). The FS is collected every few months by vacuum trucks. *Johkasou* are onsite wastewater treatment units for the treatment of blackwater, or black- and greywater. *Johkasou* can include different physical, chemical and biological treatments such as contact aeration, anaerobic filter, nitrification and denitrification, phosphorus removal and chlorination. FS from *johkasou* is collected once a year by vacuum trucks [30]. Although the sludge from *johkasou* may be more similar to wastewater sludge as it may include primary and secondary sludge from a biological treatment unit, this paper defined *johkasou* as FS based on the definition of FS by Strande [3]. This definition specifies that FS comes from all types of onsite sanitation technologies that are not connected to sewers and has been widely accepted by the sector. The FS samples were collected from receiving or storage tanks at five FS treatment plants in Kusatsu, Nakatsu, Nose, Togane and Goshogawara.

In Switzerland, six primary (Primary\_CH), waste-activated (Activated\_CH) and anaerobically digested (Digested\_CH) wastewater sludge samples were collected. Primary\_CH was collected from primary sedimentation tanks, Activated\_CH from aeration tanks and Digested\_CH from anaerobic digesters. All treatment plants operated with nitrification, denitrification and chemical phosphorus removal. Activated sludge processes included plug flow or sequencing batch reactor configurations. Digested\_CH is a mixture of primary sludge and waste-activated sludge. Retention times in the anaerobic digester were 20–30 days [31]. Samples were collected from wastewater treatment plants in Fallanden, Bassersdorf, Neuguth, Effretikon, Zurich-Werthoelzli and Uster. Multiple grab samples were collected from each tank and mixed to one composite sample per sample category.

**Table 1.** Country, type of sludge (FS: faecal sludge; WWS: wastewater sludge), technology, name of sample category and  $n$  = number of samples analysed in this study.

Country	Type of sludge	Technology	Name of sample category	$n$
Vietnam	FS	Septic tank of households	Septic_VN	10
Vietnam	FS	Septic tank of public pay-for-use toilets	Public_Septic_VN	4
Uganda	FS	Septic tank	Septic_UG	13
Uganda	FS	Unlined pit latrine	Unlined_UG	5
Uganda	FS	Lined pit latrine	Lined_UG	16
Japan	FS	Lined pit latrine	Lined_JP	16
Japan	FS	<i>Johkasou</i> tank	Johkasou_JP	9
Switzerland	WWS	Primary sedimentation tank	Primary_CH	6
Switzerland	WWS	Aeration tank	Activated_CH	6
Switzerland	WWS	Anaerobic digester	Digested_CH	6

All collected samples were kept refrigerated prior to analyses. FS samples were removed from the refrigerator and left to attain room temperature before analyses.

### Sludge analyses

Conventional mechanical dewatering such as belt filters or centrifuges removes the free water from sludge [32,33]. In this study, dewaterability was defined as total solids (TS) following removal of free water during dewatering. It was estimated as  $\%TS_{\text{final}}$ , the  $\%TS$  of the pellet remaining at the bottom of a 50 mL centrifuge tube following centrifugation (3000 rpm, 20 min) and discarding of the supernatant.  $\%TS_{\text{final}}$  has been used for the relative dewaterability of wastewater sludge [23,34].

Dewatering rate was defined as the rate that free water is released from sludge and was estimated by capillary suction time (CST (s)). CST was measured with a meter (304M CST, Triton Electronics Ltd, UK) according to standard methods [35]. The CST was normalized to TS (s/(g TS/L)) to allow comparison of CST results between sludge samples with different TS concentrations [36,37].

The following characteristics, which potentially influence dewatering performance [18–24], were analysed: pH, electrical conductivity (EC), temperature, TS, total suspended solids (TSS), total volatile solids (TVS), volatile suspended solids (VSS), ash, sand content, chemical oxygen demand (COD), total nitrogen (TN), ammonium nitrogen ( $\text{NH}_4\text{-N}$ ), crude protein, surface charge and particle size distribution.

TS, TSS, VSS and TVS were analysed according to standard methods [35]. Ash was determined as the residue following TVS analysis. Sand content was analysed gravimetrically after washing the residue of combustion at 550°C for 2 h with 0.1 mole/L hydrogen chloride [23]. Following washing until the filtrate remained clear, the residue was combusted again at 550°C for 2 h. COD, TN and  $\text{NH}_4\text{-N}$  were analysed with Hach vials according to the manufacturer's directions. Crude protein was used as a proxy for EPS (extracellular polymeric substances) and approximated based on an organic nitrogen-to-crude protein conversion factor of 6.5 [38]; organic nitrogen ( $N_{\text{org}}$ ) was estimated as the difference between TN and  $\text{NH}_4\text{-N}$ . pH, temperature and EC were measured with handheld pH, temperature and EC probes.

Surface charge was analysed with small modifications from the colloidal titration method [39,40]. Samples were diluted to a solution of around 5 g TS/L. Following, 10 mL of 2.5 mmol/L polydiallyldimethylammonium chloride standard solution (WAKO, Osaka, Japan) were added to 90 mL of distilled water and mixed for 1 min. After the addition of 2 mL of phosphate urea magnesium buffer,

10 mL of the diluted sample were slowly added and mixed for 10 min. Subsequently, a few drops of toluidine blue were added and mixed for 5 min and the solution was titrated with 2.5 mmol/L potassium polyvinylsulfate standard solution (WAKO, Osaka) until a change of colour from blue to pink was observed.

Particle size distribution was determined gravimetrically by serial filtration based on Tchobanoglous et al. [41]. Between 15 and 260 mL of sample were poured in serial through a 1 mm, 0.075 mm and 0.032 mm sieve and 0.01 mm filter (Whatman Nuclepore Track-Etched) followed by weighing the dry mass of the residue on each sieve and filter. A sample volume of 2–40 mL was used to allow for complete filtration with the 0.01 mm filter. The sum of the mass of residues on the sieves and filter for each sample had around  $\pm 20\%$  difference compared to the TS for the same sample. Particle sizes were grouped based on Karr and Keinath [19] into settleable ( $75\ \mu\text{m} < \text{particles} < 5000\ \mu\text{m}$ ), supracolloidal ( $32\ \mu\text{m} < \text{particles} < 75\ \mu\text{m}$ ) and colloidal-dissolved ( $10\ \mu\text{m} < \text{particles} < 32\ \mu\text{m}$ ) solids.

Large particles in FS interfere with analysis. Therefore, samples were screened through a 5-mm sieve before all analyses. In addition, samples were homogenized with a blender before analysis of TS, TSS, TVS, sand content, surface charge and  $\%TS_{\text{final}}$ .

### Data analysis

Results of sludge analyses in this study were non-parametrically distributed. For data comparison across sample categories, medians were compared with bootstrapping in Python with Anaconda 4.4.0. Bootstrapping was chosen based on the small sample number and the large variability of analyses results [42]. According to Schmid and Huber [42], results are presented as the 75% confidence interval of the median of 10,000 bootstrapping experiments for each sample category. Significant differences among sample categories were identified by comparing medians in each bootstrapping experiment. Sample categories were considered as significantly different if the median was higher or lower in at least 95% of bootstrapping experiments. Public\_septic\_VN and Unlined\_UG were excluded in the comparison among sample categories of dewatering rate and dewaterability due to the small sample number.

Stepwise multiple linear regression analysis was conducted with bootstrapping in R version 3.3 [43] with the package relaimpo version 2.2-2 [44] to evaluate the influence of FS characteristics on CST and  $\%TS_{\text{final}}$ . To simplify the regression analysis, wastewater sludge and Johkasou\_JP were excluded from the regression analysis since these sludges are generated in highly controlled

treatment processes that are very different from conditions in septic tanks and lined or unlined pit latrines.

Bootstrapping regression analysis was repeated 1000 times. Prior to regression analysis, characteristics with co-linearity ( $-0.7 < r < 0.7$ ) were excluded from the data set with Spearman's rank correlation matrix (see supplemental material Table S2). Following, 14 characteristics (regressors) were selected for regression analysis, namely, pH, EC (mS/cm), TS (g/L), settleable solids (%TS), sand content (%TS),  $\text{NH}_4\text{-N}$  (mg/g TS), COD (mg/g TS), crude protein (mg/g TS), TVS (%TS), surface charge (meq/g TS), supracolloidal solids (%TS), TSS (%TS), TDS (g/L) and VSS (%TSS). Two separate bootstrapping multiple regression analyses were conducted: (1) with TSS (%TS), TDS (g/L) and VSS (%TSS) excluded from regression due to a lack of results for most FS samples from Uganda ( $n = 50$ ) and (2) with all 14 characteristics included, but the sample number reduced due to the lack of data in Uganda ( $n = 40$ ). The first analysis is reported in this paper, the second analysis is included in the supplemental material (Figure S1). Characteristics to be included in a regression model and their contributions to  $R^2$  varied in each bootstrapping experiment. The relative importance, which is the influence of each regressor on  $R^2$  of the regression model [44], was calculated so that the influence of each parameter on the regression models of CST and  $\%TS_{\text{final}}$  could be compared. Characteristics that had a median relative importance higher

than 10% were considered as having a significant influence on the regression models.

## Results and discussion

### Descriptive statistics of FS characteristics

Results of physical and chemical characteristics of FS samples are reported in Table 2, together with values from the literature for comparison. The mean TS, TVS, COD and  $\text{NH}_4\text{-N}$  were 2.0–3.2%, 50.9–73.2%TS, 16.3–33.9 g/L and 184–598 mg/L for septic tank FS samples, and 1.1–2.2%, 54.0–60.6%TS, 10.9–21.6 g/L and 1417–1654 mg/L for lined pit latrine FS samples. The mean CST and  $\%TS_{\text{final}}$  were 11–28 s/(g TS/L) and 11–18% for septic tank FS samples, and 49–63 s/(g TS/L) and 18–20% for lined pit latrine FS samples, respectively. These results are in reason to those reported in the literature (see Table 2), which could corroborate the results of this study.

Results of this study were not normally distributed, as indicated by the large difference between the mean and median, and had a large variability, as indicated by the standard deviation. The large variability of FS characteristics has also been reported by previous studies (see Table 2). Considering the non-parametric distribution and large variability of results, bootstrapping data analysis was applied in this study as it does not require a parametric distribution and can visualize the variability of results by confidence intervals.

**Table 2.** Descriptive statistics (med.: median; SD: standard deviation) of physical and chemical characteristics of all FS sample categories.

Name of sample category	<i>n</i>		pH	EC	TS	TVS	COD	$\text{NH}_4\text{-N}$	CST	$\%TS_{\text{final}}$
			–	mS/cm	%	%TS	g/L	mg/L	s/(g TS/L)	%TS
Septic_VN	10	Mean	7.7	2.3	2.1	73.2	24.9	184	23	11
		Med.	7.8	2.0	1.8	75.5	22.1	183	22	12
		S.D.	0.5	1.3	1.3	6.1	14.2	77	9	2
Public_septic_VN	4	Mean	7.4	5.6	3.2	56.5	33.9	598	11	13
		Med.	7.7	3.7	1.7	56.0	17.3	379	13	13
		S.D.	1.1	5.6	4.2	12.8	45.8	691	4	7
Septic_UG	13	Mean	7.4	5.7	2.0	50.9	16.3	579	28	18
		Med.	7.7	4.9	1.8	57.0	13.8	626	27	14
		S.D.	0.7	5.9	1.6	18.9	13.6	548	18	13
Septic tank values from the literature <sup>a</sup>	–	Range of mean values	–	2.4–5.0	0.8–4.0	55–71	8.2–37.7	150–600	3–21	–
Lined_UG	16	Mean	7.8	14.6	2.2	54.0	21.6	1654	49	20
		Med.	7.8	13.6	1.7	56.0	20.8	1498	56	17
		S.D.	0.2	7.7	1.0	12.0	8.9	848	22	9
Lined_JP	16	Mean	7.4	12.6	1.1	60.6	10.9	1417	63	18
		Med.	7.3	12.4	1.1	63.0	9.8	1290	44	19
		S.D.	0.6	2.5	0.3	17.9	4.5	362	57	6
Lined pit values from literature <sup>a</sup>	–	Range of mean values	–	18.1	0.9–5.2	57–64	34.0–65.5	1418–2100	–	–
Unlined_UG	5	Mean	7.8	12.1	17.9	43.2	117.6	3175	10	30
		Med.	7.8	12.0	14.8	52.0	127.2	3110	9	30
		S.D.	0.2	3.7	9.5	15.1	40.8	839	4	10
Johkasou_JP	9	Mean	7.0	2.2	1.0	74.0	13.2	239	66	9
		Med.	7.1	1.7	1.0	77.0	12.6	178	30	8
		S.D.	0.4	2.0	0.4	13.4	6.6	193	93	3

Note: Septic\_UG: septic tank Uganda; Septic\_VN: septic tank of households Vietnam; Public\_septic\_VN: septic tank of public pay-for-use toilets Vietnam; Lined\_UG: lined pit latrine Uganda; Lined\_JP: lined pit latrine Japan; Unlined\_UG: unlined pit latrine Uganda; Johkasou\_JP: *johkasou* tank Japan.

<sup>a</sup>Range of mean values from the literature and unpublished data from Sandec/Eawag [12–14, 25, 45–48].




## Sludge dewatering performance

### Dewatering rate (CST)

CST, reported in Figure 1, was used as a metric of sludge dewatering rate. As has been previously reported [13,25,26], in this study, FS had a slower dewatering rate compared to wastewater sludge, with the median CST of FS of 19–61 s/(g TS/L) (75% confidence interval of bootstrapped median), compared to the median CST of wastewater sludge of 3–19 s/(g TS/L). The median CST was 48–60 s/(g TS/L) for Lined\_UG, 31–61 s/(g TS/L) for Lined\_JP, 22–54 s/(g TS/L) for Johkasou\_JP, 19–38 s/(g TS/L) for Septic\_UG, 19–29 s/(g TS/L) for Septic\_VN, 10–19 s/(g TS/L) Digested\_CH, 4–5 s/(g TS/L) for Primary\_CH and 3–5 s/(g TS/L) for Activated\_CH. The results indicate that co-treatment of sludge from septic tanks and wastewater sludge can decrease the overall dewatering rate compared to wastewater sludge, as reported by [25].

FS from lined pit latrines had significantly slower rates of dewatering than FS from septic tanks, except for Lined\_JP and Septic\_UG. Dewatering rates within the same technology types were not significantly different, even between different countries (i.e. septic\_UG and septic\_VN, Lined\_UG and Lined\_JP), suggesting that dewatering rate could be influenced by the types of onsite sanitation technologies. This could be due to factors such as the technology design, construction and operation (e.g. emptying frequency, waste products entering the technology). This also illustrates the importance of

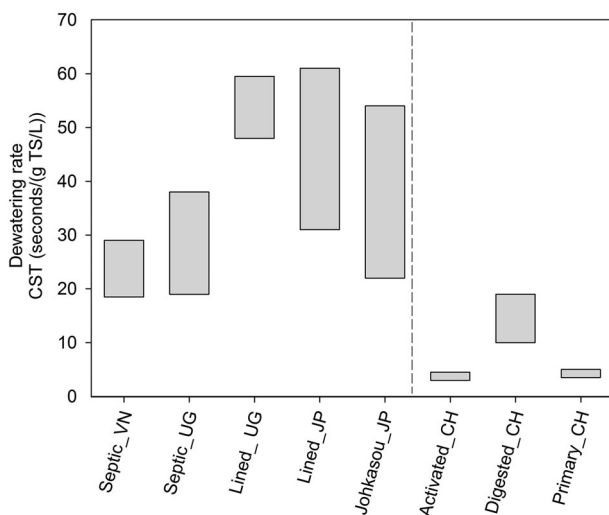

**Figure 1.** 75% confidence interval of the bootstrapped median of dewatering (CST) for FS and wastewater sludge.


Note: Septic\_VN: septic tank of households Vietnam; Septic\_UG: septic tank Uganda; Lined\_UG: lined pit latrine Uganda; Lined\_JP: lined pit latrine Japan; Johkasou\_JP: johkasou tank Japan; Activated\_CH: wastewater aeration tank Switzerland; Digested\_CH: wastewater anaerobic digester Switzerland; Primary\_CH: wastewater primary sedimentation tank Switzerland.

designing solutions for the local context based on different types of onsite sanitation technologies and conducting laboratory and pilot-scale experiments to validate the design of dewatering technologies [49].

Another aspect illustrated by the confidence intervals in Figure 1 is the increased variability of FS results compared to wastewater sludge. This is not surprising, as wastewater is homogenized during transport in the sewer, and samples were collected from homogenization tanks at centralized treatment plants. FS is not homogenized, and samples were collected from individual pits or tanks at the household level. Storage tanks or settling-thickening tanks could be a way to reduce this variability at FS treatment plants and facilitate dewatering operations, but they would have to be quite large. For example, in Japan where there are around 1000 FS treatment plants, storage tanks typically have a volume of three times the daily treatment capacity for equalization [50].

### Dewaterability (%TS<sub>final</sub>)

%TS<sub>final</sub>, reported in Figure 2, was used as a metric of sludge dewaterability, and the results were variable between sample categories. The %TS<sub>final</sub> of Septic\_VN of 11–12%TS (75% confidence interval of bootstrap median) and Johkasou\_JP of 6–9%TS were significantly lower than that of Primary\_CH of 12–15%TS. The %TS<sub>final</sub> of all types of FS except for Johkasou\_JP was significantly higher than Activated\_CH of 5–6%TS and Digested\_CH of 8–9%TS. Johkasou\_JP had a similar %TS<sub>final</sub> to

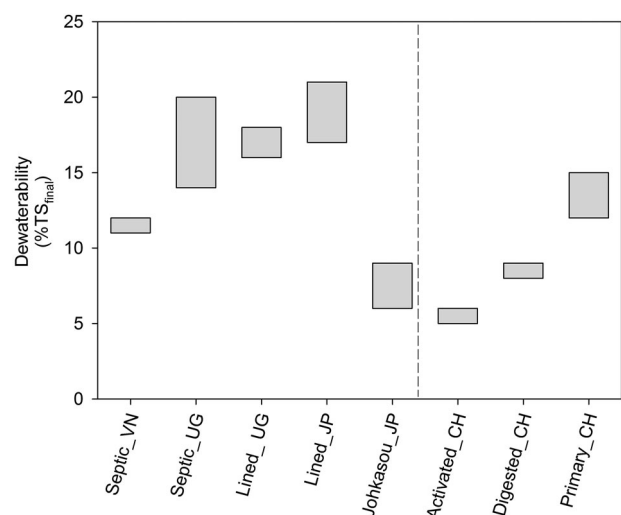

**Figure 2.** 75% confidence interval of the bootstrapped median dewaterability (%TS<sub>final</sub>) of FS and wastewater sludge.

Note: Septic\_VN: septic tank of households Vietnam; Septic\_UG: septic tank Uganda; Lined\_UG: lined pit latrine Uganda; Lined\_JP: lined pit latrine Japan; Johkasou\_JP: johkasou tank Japan; Activated\_CH: wastewater aeration tank Switzerland; Digested\_CH: wastewater anaerobic digester Switzerland; Primary\_CH: wastewater primary sedimentation tank Switzerland.

that of Activated\_CH and Digested\_CH. The similarity of Johkasou\_JP and wastewater sludge is likely due to the similarity of treatment technologies, as most *johkasou* employ the activated sludge process [30]. Results for septic tank and pit latrine FS indicate that some types of FS could have a higher dewaterability than activated sludge and digested wastewater sludge; however, the higher dewaterability associated with high sand contents may pose a negative impact on FS resource recovery and final disposal, as mentioned below.

In contrast to the dewatering rate, dewaterability was different between FS from the same type of onsite sanitation technology. Whereas no significant difference was observed between Lined\_UG (16–18%TS) and Lined\_JP (17–21%TS), Septic\_UG (14–20%TS) had a significantly higher %TS<sub>final</sub> than Septic\_VN. Lined\_UG, Lined\_JP and Septic\_UG had a significantly higher %TS<sub>final</sub> than Septic\_VN. In contrast to the CST results, these results indicate that dewatering of FS cannot be predicted based on the onsite sanitation technology. In addition, based on the size of confidence intervals in Table 2, the variability of FS had a smaller influence on dewaterability than dewatering rate.


### Influence of FS characteristics on the dewatering performance

Multiple linear regression analysis with bootstrapping was used to identify analysed characteristics of FS that


have a strong correlation to dewatering performance. All of the FS samples were analysed together, other than Johkasou\_JP due to its similarity to wastewater sludge. The results of the analyses are presented in Figure 3 as the %R<sup>2</sup> of the dewatering rate (as CST) and in Figure 4 as dewaterability (as %TS<sub>final</sub>). The median R<sup>2</sup> of 1,000 bootstrapping experiments was 0.67 for CST and 0.76 for %TS<sub>final</sub>, which are reasonable considering the large variability of FS characteristics.

As shown in Figure 3, characteristics related to the electrochemical properties of sludge had the largest contribution to R<sup>2</sup> in the CST regression model. NH<sub>4</sub>-N (mg/g TS) had a median relative importance of 22%, surface charge (meq/g TS) of 20%, EC (mS/cm) of 12% and crude protein (mg/g TS) of 12%. NH<sub>4</sub>-N and EC positively correlated to increased CST, whereas surface charge and crude protein negatively correlated.

These results are similar to those observed with wastewater sludge. Cations play an important role in the dewatering of wastewater sludge. A high concentration of monovalent cations, such as NH<sub>4</sub><sup>+</sup>, Na<sup>+</sup> and K<sup>+</sup>, destabilize flocs and increase CST (i.e. decrease dewatering rate) by replacing divalent cations [51–53]. In this study, an increase of NH<sub>4</sub>-N was observed to also correlate to increase CST. However, this study did not investigate Na<sup>+</sup> and K<sup>+</sup>, which could also have had an impact. The increase in CST with a decrease in surface charge is likely due to electrostatic forces on the sludge surface that repel particles [20,54,55]. The influence of

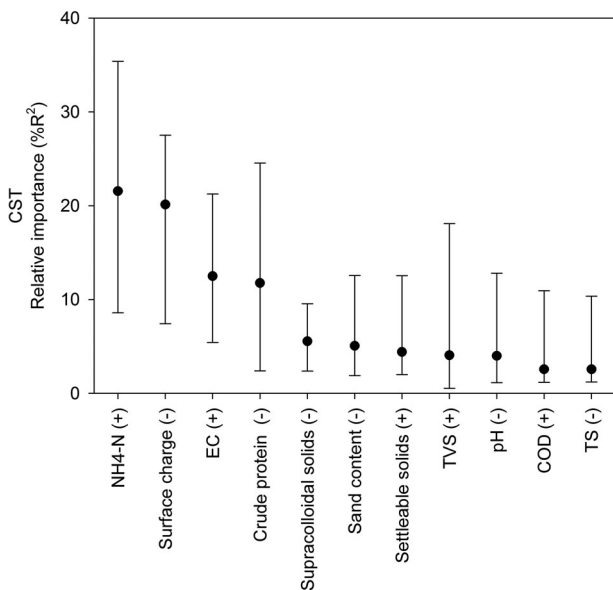

**Figure 3.** Relative importance of correlation of FS characteristics to the dewatering rate (as CST (s/(g TS/L))), calculated by bootstrapping multiple regression analysis. The figure shows bootstrapping median and 95% confidence interval, (+) and (–) indicate the direction of influence by each characteristic.

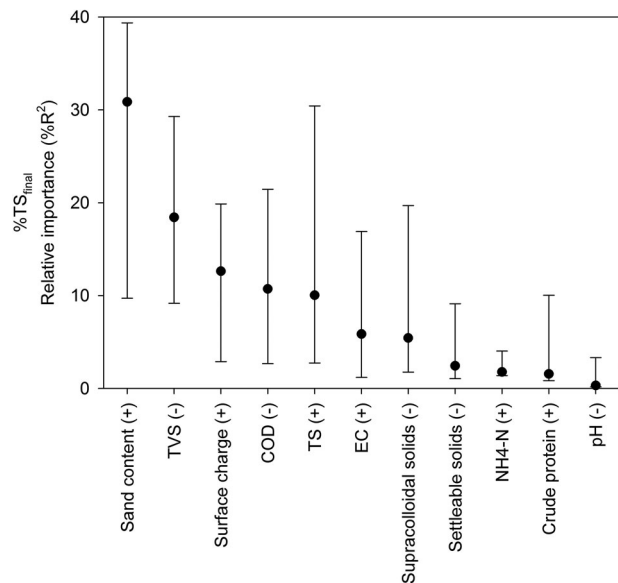

**Figure 4.** Relative importance of correlation of FS characteristics to the dewaterability (as %TS<sub>final</sub>), calculated by bootstrapping multiple regression analysis. The figure shows bootstrapping median and 95% confidence interval, (+) and (–) indicate the direction of influence by each characteristic.



EC on CST is likely due to the correlation to  $\text{NH}_4\text{-N}$  ( $r = 0.6$ , see supplemental material Table S2). High  $\text{NH}_4\text{-N}$  concentrations could also inhibit anaerobic digestion which could influence dewatering rate [56,57]. It was hypothesized that crude protein as a metric of EPS would correlate to increased CST, as protein is a major component of EPS, and EPS increased CST in wastewater sludge [58,59]. However, crude protein correlated to a decreased CST, which could be due to a poor correlation between crude protein and EPS, as EPS is also composed of carbohydrates. Crude protein was also negatively correlated to  $\text{NH}_4\text{-N}$  ( $r = 0.5$ , see supplemental material Table S2), which did correlate to an increased CST.

As shown in Figure 4, characteristics related to the solid properties of sludge had the largest contribution to  $R^2$  in the  $\%TS_{\text{final}}$  regression model. Sand content ( $\%TS$ ) had a median relative importance of 31%, TVS ( $\%TS$ ) of 18% and TS (mg/L) of 10%. Surface charge (meq/g TS) and COD (mg/g TS) were also significant with a median relative importance of 13% and 11%, respectively. Other than surface charge, the characteristics that correlated to dewaterability were different to those that correlated to the dewatering rate.

Sand content and TVS accounted for almost 50% of  $R^2$ . TVS correlated to a decreased  $\%TS_{\text{final}}$ . This is in line with results from wastewater sludge. Skinner et al. [24] observed that TVS correlated to decreased dewaterability of wastewater sludge. COD also correlated to a decreased  $\%TS_{\text{final}}$  as COD and TVS are both metrics of organic matter in sludge. In contrast, sand content correlated to an increased  $\%TS_{\text{final}}$ . This is also similar to previous observations, as inorganic particles measured as sand or ash have been observed to increase dewaterability [23]. This can be explained as inorganics having weaker or no surface charge, in comparison to organics, which have a lower


compressibility, and can also provide channels for the drainage of free water.

However, high  $\%TS_{\text{final}}$  of FS may pose a negative impact on FS resource recovery and final disposal. For example, Unlined\_UG that was not included into multiple regression analysis due to the small sample size, had a sand content of 45–69%TS and a  $\%TS_{\text{final}}$  of 22–37% (see supplemental material Table S1). Although its  $\%TS_{\text{final}}$  was high, this high concentration of sand contents would cause difficulties for resource recovery from sludge (e.g. incineration [15]), and increased costs for disposal in landfills.


### Application and limitations of results

FS characteristics that were identified to correlate to dewatering rate and dewaterability based on bootstrapping multiple linear regression models could be used to predict dewatering performance and may explain the differences in dewatering rate and dewaterability across the FS sample categories examined in this study. To evaluate this potential, Figures 5 and 6 include sludge characteristics for the different sample categories that had a significant relative importance in the regression models. Public\_Septic\_VN and Unlined\_UG were excluded from this evaluation due to a small sample number.

Lined\_UG had a significantly lower CST than Septic\_UG and Septic\_VN, and Lined\_JP had a significantly lower CST than Septic\_VN (see Figure 1). These results could be explained by  $\text{NH}_4\text{-N}$  and EC that had a significant relative importance in the regression model for CST. As shown in Figure 5,  $\text{NH}_4\text{-N}$  and EC that correlated with increased CST was significantly different between sample categories. Lined\_UG and Lined\_JP had significantly higher median  $\text{NH}_4\text{-N}$  and EC than Septic\_VN

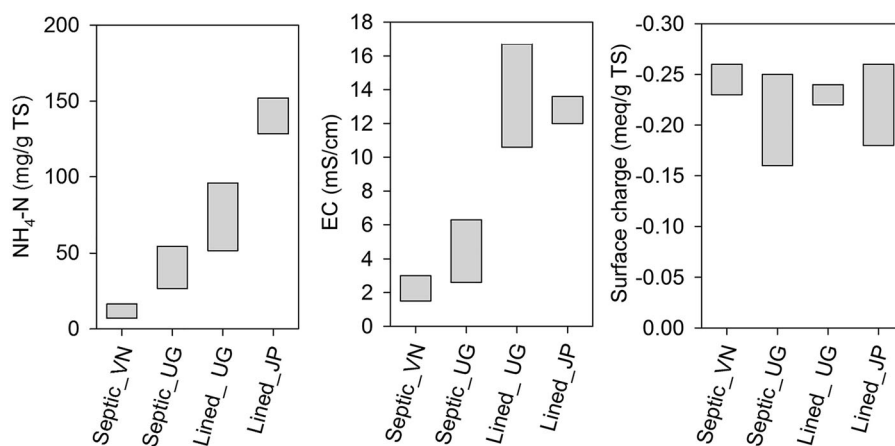

**Figure 5.** 75% confidence interval of the bootstrapped median of  $\text{NH}_4\text{-N}$  (left), EC (centre) and surface charge (right) for septic tank and lined pit latrine FS.

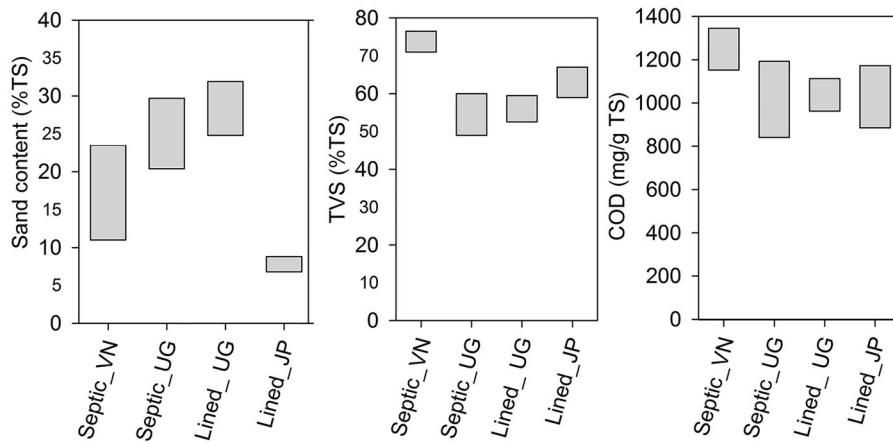

**Figure 6.** 75% confidence interval of the bootstrapped median of sand content (left), TVS (centre) and COD (right) for septic tank and lined pit latrine FS.

and Septic\_UG: 52–152 mg/g TS vs. 7–54 mg/g TS; 11–17 mS/cm vs. 2–6 mS/cm. High  $\text{NH}_4\text{-N}$  and EC are characteristic of FS from lined pit latrines due to more concentrated FS with no overflow [26,60]. These results imply that the  $\text{NH}_4\text{-N}$  and EC could be responsible for the observed poor dewatering performance of pit latrine FS compared to septic tank FS. If so, this result could be very valuable in the design and operation of onsite sanitation technologies, and treatment technologies. In contrast, surface charge (see Figure 5) and crude protein (see supplemental material Table S1) which did have a strong correlation to CST were not significantly different between sample categories. Results for crude protein were not significantly different between sample categories and are therefore not included in Figure 5.

Septic\_UG, Lined\_UG and Lined\_JP had a significantly higher  $\%TS_{\text{final}}$  than Septic\_VN (see Figure 2). These results could be explained by TVS, COD and sand content that had a significant relative importance in the regression model for  $\%TS_{\text{final}}$ , because as shown in Figure 6, TVS, COD and sand content were significantly different among the sample categories. TVS that correlated to decreased  $\%TS_{\text{final}}$  were significantly higher for Septic\_VN (71–77%TS) than for Septic\_UG (49–60%TS), Lined\_UG (53–60%TS) and Lined\_JP (59–67%TS). COD that correlated to decreased  $\%TS_{\text{final}}$  were significantly higher for Septic\_VN (1152–1345 mg/g TS) than for Lined\_UG (962–1112 mg/g TS). However, results for Lined\_JP indicate limitations of explaining the dewaterability by single characteristics. Lined\_JP had significantly lower sand content (7–9%TS) than the other types of FS (11–32%TS), which based on this explanation would be in contradiction to Lined\_JP having significantly higher  $\%TS_{\text{final}}$  than Septic\_VN (see Figure 2). These results are likely due to the interrelation of

multiple characteristics having an influence on dewaterability. Further, as mentioned in the previous section, high sand contents would pose a negative impact on resource recovery and final disposal although it was strongly correlated to increased  $\%TS_{\text{final}}$ . Results for TS were only significantly different between lined\_UG and lined\_JP and are therefore not included in Figure 6.

The different observed concentrations of TVS, COD and sand content in the different types of FS are due to the wide ranging differences in the design, construction and operation of onsite technologies, including the solids retention time, influx of sand due to poor construction, and types and volumes of waste products. For example, lined pit latrines in Japan are made of fibre-reinforced plastic and are constructed at factories, whereas lined pit latrines in Uganda are constructed *in situ* with bricks. This difference alone could contribute to the higher sand concentrations that were observed for Lined\_UG FS. Thus, differences in types of construction, different materials and modes of operation could potentially also provide ways to predict dewaterability of FS.

## Conclusions

Highly variable dewatering performance of FS greatly complicates the reliable design and operation of treatment plants. These results provide the first published reference comparing dewatering rates and dewaterability of FS from different regions around the world. The results identify potential characteristics that could explain and predict the high variability that is observed in the field. Future research in this area is needed for the improved design and operation of FS treatment plants. Findings include:

- FS samples had a significantly higher CST, indicating lower dewatering rate than wastewater sludge;
- FS samples had an equal or higher %TS<sub>final</sub> compared to wastewater sludge;
- However, if higher %TS<sub>final</sub> are caused by high sand contents, it would pose a negative impact on resource recovery and final disposal;
- Electrochemical properties had the strongest correlation to FS dewatering rate, and solid properties on FS dewaterability;
- FS characteristics that were strongly correlated to dewatering could explain observed differences in dewatering between different types of FS;
- Future research is needed to develop predictive models of sludge characteristics on dewatering, based on a fundamental understanding of FS dewatering mechanisms.

### Disclosure statement

No potential conflict of interest was reported by the authors.

### Funding

This study was funded by the Swiss Development Corporation (SDC): Water and Environmental Sanitation Services for the Poor (WESSP), the Japan Society for the Promotion of Science (JSPS) [grant number JP 16H02748] and the Fonds de recherche du Québec – Nature et technologies (FRQNT) [grant number 191558].

### ORCID

Moritz Gold  <http://orcid.org/0000-0001-7285-6164>

Hidenori Harada  <http://orcid.org/0000-0002-7685-7751>

### References

- [1] Cairns-Smith S, Hill H, Nazarenko E. Working paper urban sanitation: why a portfolio of solutions is needed. The Boston Consulting Group; 2014.
- [2] Harada H, Strande L, Fujii S. Challenges and opportunities of faecal sludge management for global sanitation. In: Katsumi T, Hashimoto S, editors. Towards future earth: challenges and progress of global environmental studies. Tokyo (Japan): Kaisei Publishing; 2016. p. 81–100 (ISBN 978-4-87603-500-7).
- [3] Strande L. The global situation. In: Strande L, Ronteltap M, Brdjanovic D, editors. Faecal sludge management: systems approach for implementation and operation. London (UK): IWA Publishing; 2014. p. 1–14.
- [4] Peal A, Evans B, Blackett I, et al. A review of fecal sludge management in 12 cities. Washington (DC): World Bank – Water and Sanitation Program; 2015.
- [5] Schoebitz L, Niwagaba CB, Strande L. Kampala, Uganda: sanitation service delivery context analysis and mapping of excreta flows along the sanitation service chain and throughout the city. Dübendorf: Eawag/Sandec; 2016 [cited 2017 July 14]. Available from: [www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD\\_Sandec\\_Kampala.pdf](http://www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD_Sandec_Kampala.pdf)
- [6] Brandes K, Schoebitz L, Kimwaga R, et al. Dar es Salaam Tanzania: sanitation service delivery context analysis and mapping of excreta flows along the sanitation service chain and throughout the city. Dübendorf: Eawag/Sandec; 2015 [cited 2017 July 14]. Available from: [www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD\\_Sandec\\_Dar\\_es\\_Salaam.pdf](http://www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD_Sandec_Dar_es_Salaam.pdf)
- [7] Brandes K, Schoebitz L, Nguyen VA, et al. Hanoi, Vietnam: sanitation service delivery context analysis and mapping of excreta flows along the sanitation service chain and throughout the city. Dübendorf: Eawag/Sandec; 2016 [cited 2017 July 14]. Available from: [www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD\\_Sandec\\_Hanoi.pdf](http://www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD_Sandec_Hanoi.pdf)
- [8] Harada H, Schoebitz L, Strande L. Danang, Vietnam: sanitation service delivery context analysis and mapping of excreta flows along the sanitation service chain and throughout the city. Dübendorf: Eawag/Sandec; 2015 [cited 2017 July 14]. Available from: [www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD\\_Sandec\\_Danang.pdf](http://www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD_Sandec_Danang.pdf)
- [9] Harada H, Schoebitz L, Strande L. Nonthaburi, Thailand: sanitation service delivery context analysis and mapping of excreta flows along the sanitation service chain and throughout the city. Dübendorf: Eawag/Sandec; 2015 [cited 2017 July 14]. Available from: [www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD\\_Sandec\\_Nonthaburi.pdf](http://www.eawag.ch/fileadmin/Domain1/Abteilungen/sandec/publikationen/EWM/SFD/SFD_Sandec_Nonthaburi.pdf)
- [10] Hutton G, Haller L. Evaluation of the costs and benefits of water and sanitation improvements at the global level. Water, Sanitation, and Health, Protection of the Human Environment, Geneva: World Health Organization; 2004.
- [11] Mara D, Lane J, Scott B, et al. Sanitation and health. PLoS Med. 2010;7(11):e1000363.
- [12] Seck A, Gold M, Niang S, et al. Faecal sludge drying beds: increasing drying rates for fuel resource recovery in Sub-Saharan Africa. J Water Sanit Hyg Dev. 2015;5(1):72–80.
- [13] Gold M, Dayer P, Faye MCAS, et al. Locally produced natural conditioners for dewatering of faecal sludge. Environ Technol. 2016;37(21):2802–2814.
- [14] EhM S, Mbéguéré M, Diop C, et al. Effect of hydraulic loading frequency on performance of planted drying beds for the treatment of faecal sludge. J Water Sanit Hyg Dev. 2014;4(4):633–641.
- [15] Gold M, Ddiba DI, Seck A, et al. Faecal sludge as a solid industrial fuel: A pilot-scale study. J Water Sanit Hyg Dev. 2017;7(2):243–251.
- [16] Niwagaba CB, Mbéguéré M, Strande L. Faecal sludge quantification, characterization and treatment objectives. In: Strande L, Ronteltap M, Brdjanovic D, editors. Faecal sludge management: systems approach for implementation and operation. London (UK): IWA Publishing; 2014. p. 19–44.
- [17] Mikhael G, Robbins DM, Ramsay JE, Mbéguéré M. Methods and means for collection and transport of Faecal sludge. In: Strande L, Ronteltap M, Brdjanovic D, editors. Faecal sludge management: systems approach for

- implementation and operation. London (UK): IWA Publishing; 2014. p. 141–154.
- [18] Mikkelsen LH, Keiding K. Physico-chemical characteristics of full scale sewage sludges with implications to dewatering. *Water Res.* 2002;36(10):2451–2462.
- [19] Karr PR, Keinath TM. Influence of particle size on sludge dewaterability. *J Water Pollut Control Fed.* 1978;50(8):1911–1930.
- [20] Kopp J, Dichtl N. Influence of surface charge and exopolysaccharides on the conditioning characteristics of Sewage sludge. In: Hahn HH, Hoffmann E, Ødegaard H, editors. *Chemical water and wastewater treatment V: proceedings of the 8th Gothenburg symposium, 1998 Sept 7–9; Prague, Czech Republic.* Berlin, Heidelberg (Germany): Springer; 1998. p. 285–296.
- [21] Turovskiy IS, Mathai P. *Wastewater sludge processing.* Hoboken (NJ): Wiley; 2006.
- [22] Christensen ML, Keiding K, Nielsen PH, et al. Dewatering in biological wastewater treatment: a review. *Water Res.* 2015;82:14–24.
- [23] German Association for Water. WaWD Merkblatt DWA-M 383 Kennwerte der Klärschlammwässerung (leaflet DWA – M 383 Characteristic values for wastewater sludge dewatering). Hennef: Deutsche Vereinigung für Wasserwirtschaft, Abwasser und Abfall (DWA) (German Association for Water, Wastewater and Waste); 2008.
- [24] Skinner S, Studer L, Dixon D, et al. Quantification of wastewater sludge dewatering. *Water Res.* 2015;82:2–13.
- [25] United States Environmental Protection Agency (US EPA). *Handbook of septage treatment and disposal.* Cincinnati (OH): US EPA; 1984.
- [26] Heinss U, Larmie SA, Strauss M. Solids separation and pond systems for the treatment of faecal sludges in the tropics. Lessons learnt and recommendations for preliminary design. Dübendorf: Eawag/Sandec; 1998.
- [27] Nakagiri A, Kulabako RN, Nyenje PM, et al. Performance of pit latrines in urban poor areas: a case of Kampala, Uganda. *Habitat Int.* 2015;49:529–537.
- [28] Tilley E, Ulrich L, Lüthi C, et al. *Compendium of sanitation systems and technologies.* Dübendorf: Eawag; 2014.
- [29] Harada H, Dong NT, Matsui S. A measure for provisional-and-urgent sanitary improvement in developing countries: septic-tank performance improvement. *Wat Sci Tech.* 2008;58(6):1305–1311.
- [30] Japan Education Center of Environmental Sanitation (JECES). *Johkasou systems for domestic wastewater treatment.* 5th ed. Tokyo: JECES; 2012.
- [31] Department of Waste, Water, Energy (AMWEL), Canton Zurich. *Factsheets wastewater treatment plants.* Zurich (Switzerland): Canton Zurich; 2016.
- [32] Kopp J, Dichtl N. Prediction of full-scale dewatering results by determining the water distribution of sewage sludges. *Wat Sci Tech.* 2000;42(9):141–149.
- [33] Kopp J, Dichtl N. Influence of the free water content on the dewaterability of sewage sludges. *Wat Sci Tech.* 2001;44(10):177–183.
- [34] Denkert R. *Entwässerung mit Dekantierzentrifugen (Dewatering with decanting centrifuges), ATV-Seminar 10/93 Schlammwässerung (Sludge dewatering), Chapter. 7.1–7.26; 1995.*
- [35] American Public Health Association (APHA), American Water Work Association (AWWA), Water Environmental Federation (WEF). *Standard methods for the examination of water and wastewater.* 21st ed. Washington (DC): APHA; 2005.
- [36] Peng G, Ye F, Li Y. Comparative investigation of parameters for determining the dewaterability of activated sludge. *Water Environ Res.* 2011;83(7):667–671.
- [37] Vesilind PA. Capillary suction time as a fundamental measure of sludge dewaterability. *J Water Pollut Control Fed.* 1988;60(2):215–220.
- [38] Mariotti F, Tomé D, Mirand PP. Converting nitrogen into protein—beyond 6.25 and Jones’ factors. *Crit Rev Food Sci.* 2008;48(2):177–184.
- [39] Japan Sewage Works Association (JSWA). *Gesui Shiken Houhou (Standard methods for analysis of sewage).* Tokyo: JSWA; 2012.
- [40] Ueno K, Kina K. Colloid titration – a rapid method for the determination of charged colloid. *J Chem Educ.* 1985;62(7):627.
- [41] Tchobanoglous G, Burton FL, Stensel HD, et al., editors. *Wastewater engineering: treatment and resource recovery.* New York (NY): McGraw-Hill Higher Education; 2013.
- [42] Schmid H, Huber A. Measuring a small number of samples, and the 3v fallacy: shedding light on confidence and error intervals. *IEEE Solid-State Circuits Mag.* 2014;6(2):52–58.
- [43] R Core Team. *R: a language and environment for statistical computing.* Vienna: R Foundation for Statistical Computing; 2017.
- [44] Grömping U. Relative importance for linear regression in R: the package relaimpo. *J Stat Softw.* 2006;17(1):139–147.
- [45] Bassan M, Tchonda T, Yiougo L, et al. Characterization of faecal sludge during dry and rainy seasons in Ouagadougou, Burkina Faso. *Proceedings of the 36th WEDC International Conference 2013; Nakuru, Kenya.* Leicestershire (UK): Loughborough University; 2013.
- [46] Koottatep T, Surinkul N, Polprasert C, et al. Treatment of septage in constructed wetlands in tropical climate: lessons learnt from seven years of operation. *Wat Sci Tech.* 2005;51(9):119–126.
- [47] Kengne I, Kengne ES, Akoa A, et al. Vertical-flow constructed wetlands as an emerging solution for faecal sludge dewatering in developing countries. *J Water Sanit Hyg Dev.* 2011;1(1):13–19.
- [48] Semiyaga S, Okure MAE, Niwagaba CB, et al. Dewaterability of faecal sludge and its implications to faecal sludge management in urban slums. *Int J Environ Sci Technol.* 2017;14(1):151–164.
- [49] Dodane P-H, Ronteltap M. Unplanted drying beds. In: Strande L, Ronteltap M, Brdjanovic D, editors. *Faecal sludge management: systems approach for implementation and operation.* London (UK): IWA Publishing; 2014. p. 141–154.
- [50] Japan Waste Management Association (JWMA). *Odei saisei shori center tou shisetsuseibi no keikaku sekkei yoryo (Guideline for planning and design of sludge recycling center development).* Tokyo: JWMA; 2006.
- [51] Biggs CA, Ford AM, Lant PA. Activated sludge flocculation: direct determination of the effect of calcium ions. *Wat Sci Tech.* 2001;43(11):75–82.
- [52] Higgins MJ, Novak JT. The effect of cations on the settling and dewatering of activated sludges: laboratory results. *Water Environ Res.* 1997;69(2):215–224.

- [53] Sobeck DC, Higgins MJ. Examination of three theories for mechanisms of cation-induced bioflocculation. *Water Res.* **2002**;36(3):527–538.
- [54] Liu Y, Fang HHP. Influences of extracellular polymeric substances (EPS) on flocculation, settling, and dewatering of activated sludge. *Crit Rev Env Sci Tec.* **2003**;33(3):237–273.
- [55] Wilén B-M, Jin B, Lant P. The influence of key chemical constituents in activated sludge on surface and flocculating properties. *Water Res.* **2003**;37(9):2127–2139.
- [56] Chaggu EJ, Sanders W, Lettinga G. Demonstration of anaerobic stabilization of black water in accumulation systems under tropical conditions. *Bioresour Technol.* **2007**;98(16):3090–3097.
- [57] McCarty PL, McKinney RE. Salt toxicity in anaerobic digestion. *J Water Pollut Control Fed.* **1961**;33(4):399–415.
- [58] Houghton JI, Stephenson T. Effect of influent organic content on digested sludge extracellular polymer content and dewaterability. *Water Res.* **2002**;36(14):3620–3628.
- [59] Houghton JJ, Quarmby J, Stephenson T. Municipal wastewater sludge dewaterability and the presence of microbial extracellular polymer. *Wat Sci Tech.* **2001**;44(2–3):373–379.
- [60] Strauss M, Larmie S, Heiness U. Treatment of sludges from on-site sanitation-Low-cost options. *Wat Sci Tech.* **1997**;35(6):129–136.