PURR – PARTNERSHIP FOR URBAN RESOURCE RECOVERY

INITIAL ASSESSMENT OF SLUDGE MANAGEMENT AND CONTEXT IN FIVE CITIES: SON LA, LANG SON, HOA BINH, BAC NINH, AND BA RIA

July 2014

Magalie Bassan, Nguyet Dao, Pham Thuy, An Vu Hoai, Viet Anh Nguyen, Linda Strande



Household survey in Bac Ninh

CONTENTS

| 1 | | Project context | 4 |
|-----|-----|---|------|
| 2 | 2. | Objectives and methods of the study | 6 |
| | 2 | .1. Survey methodology | 6 |
| | 2 | .2. Interview methodology | 7 |
| 3 | 3. | National background | 7 |
| | 3 | .1. Institutional framework | 7 |
| | 3 | .2. Stakeholders organization | 8 |
| | 3 | .3. Water supply in urban areas of Vietnam | 9 |
| | 3 | .4. Drainage and wastewater management in urban areas of Vietnam | . 10 |
| | 3 | .5. Solid waste management in urban areas of Vietnam | . 11 |
| | 3 | .6. Faecal sludge management | . 11 |
| 2 | l. | Results of the surveys and interviews | . 12 |
| | 4 | .1. Environmental and economic context | . 13 |
| | 4 | .2. Wastewater management in the five project cities | . 13 |
| | 4 | .3. Sewer and wastewater sludge management in the five project cities | . 14 |
| | 4 | .4. Solid waste management in the five project cities | . 15 |
| | 4 | .5. Basic information on households and water provision | . 15 |
| | 4 | .6. Household sanitation systems | . 16 |
| | 4 | .7. Household emptying practices | . 19 |
| | 4 | .8. Faecal sludge collection and treatment | . 20 |
| |). | Conclusions on the selection of treatment strategies for the 5 cities | . 20 |
| | 5 | .1. Factors influencing the selection of treatment technologies | . 21 |
| 6 | ò. | References | . 24 |
| | | 1: Questionnaire for the household survey | |
| | | 2: List of persons contacted during the study | |
| | | 4: Questionnaire for the interview of local authorities | |
| Anı | nex | 5: National regulations for urban water and sanitation in Vietnam | 41 |
| Anı | nex | : 6: Classification of urban centers in Vietnam | 42 |

ABBREVIATION AND ACRONYMS

BOD Biological Oxygen Demand

BUSADCO Ba Ria-Vung Tau Urban Sewerage and Development Company

DOC Department of Construction

DONRE Department of Natural Resources and Environment

EAWAG Swiss Federal Institute of Aquatic Science and Technology

EPFL Swiss Federal Institute of Technology in Lausanne

HUCE Hanoi University of Civil Engineering

JSC Joint Stock Company

IESE Institute of Environmental Science and Technology
LAWASE Lang Son Water Supply and Sewerage Company
MARD Ministry of Agriculture and Rural Development

MOC Ministry of Construction
MOF Ministry of Finance
MOH Ministry of Health

MONRE Ministry of Natural Resource and Environment

MPI Ministry of Planning and Investment

PC People Committee

SANDEC Department of Water and Sanitation in Developing Countries

SECO Swiss State Secretariat for Economic Affairs

URENCO Urban Environmental Company

VIWASE Vietnam Water, Sanitation and Environment Joint Stock Company

VWSA Vietnam Water Supply and Sewerage Association

WB World Bank

WHO World Health Organization

WSSC Water Supply and Sewerage Company

WWTP Wastewater Treatment Plant

1. INTRODUCTION

The purpose of this report is to provide the current context and state of sanitation in five provincial cities in Vietnam, namely: Son La, Lang Son, Hoa Binh, Bac Ninh, and Ba Ria. The understanding of the local context and existing water and sanitation management options is important to evaluate reasonable management and treatment options of faecal and wastewater sludge in these cities. Faecal sludge is the sludge that is stored in onsite systems, but not transported in any type of sewer. Examples of onsite systems can be septic tanks, and pit latrines. Wastewater sludge is the sludge that is retained and produced in the various steps of a wastewater treatment plant (WWTP).

The production of faecal sludge and reasonable management and treatment options depends on the following assessed aspects that are discussed in the report:

- the national institutional framework defines the construction and operation of sanitation technologies, which influence the quantities and characteristics of sludge that needs to be treated, as well as the existing solutions for disposal and / or resource recovery,
- the local context defines the type of onsite systems and the production of faecal sludge,
- the water supply system influences the quantity of wastewater produced and the dilution of faecal and wastewater sludge,
- the wastewater management practices, stakeholders and infrastructures define the characteristics and quantities of sewer and wastewater sludge produced,
- the solid waste collection, transport and disposal system defines the potential solid wastes that are easily available for co-treatment with faecal and wastewater sludge,
- the faecal sludge management habits influence:
 - o the emptying frequency, and therefore quantities of faecal sludge produced,
 - the emptying method, and characteristics of faecal sludge that need to be treated, (e.g. addition of water, complete / partial removal of faecal sludge),
 - o the existing treatment and enduse options.

This report focuses on the information gathered for the five above-mentioned cities, and therefore does not discuss the situation in peri-urban or rural areas.

2. PROJECT CONTEXT

Almost 30% of the population of Vietnam lives in urban areas, and urban populations are expected to continue increasing by 1 million people annually. Rapid urbanization increases the challenge of providing sanitation and affects natural resources and the environment, especially, in terms of water pollution. In Vietnam as in other low and middle income countries, centralized sewer-based sanitation systems have been recommended for cities due to high population densities, however, onsite systems have also simultaneously been promoted (e.g. pit latrines, septic tanks). Both centralized and onsite systems produce sludge (respectively referred to in this report as wastewater sludge, and faecal sludge) which require appropriate management strategies to protect public and environmental health.

In Vietnam, management solutions for sludge are typically lacking. Faecal sludge tends to be concentrated and high in pathogens, but characteristics vary based on many factors. A thorough understanding of practices for sludge management in Vietnam, and of sludge characteristics is necessary to develop appropriate models of management.

Throughout urban areas of Vietnam, a national regulation requires septic tanks at the household level. The liquid effluents are discharged into combined sewers and/or directly into the environment, and faecal sludge accumulates within the tank. In addition to the septic tanks, there are currently

several development projects that aim to build wastewater infrastructures in provincial cities with populations of 80,000 to 170,000. In particular, SECO (Swiss State Secretary for Economy) has funded a project to improve the drainage and wastewater management in Ba Ria, and KfW (German Bank of Development) has similar projects in place in Bac Ninh, Hoa Binh, Lang Son, and Son La (see Figure 1: Location of the five cities initially involved in the PURR project). Thus, the onsite and centralized systems will coexist in these cities, but there is currently no plan in place for the management of either type of sludge. In this context, the co-treatment of faecal and wastewater sludge provides a potential solution that could make the most efficient use of resources. PURR project(Partnership for Urban Resource Recovery) focuses on the potential for anaerobic digestion of sludge, which is a promising technology for treatment production of safe-to-use or safe-to-discharge end-products.

PURR is a collaborative project between Sandec (Department of Water and Sanitation from Eawag), (Swiss Federal Institute of Aquatic Science and Technology), HUCE (Hanoi University of Civil Engineering) and EPFL (Swiss Federal Institute of Science and Technology in Lausanne) to identify options for the treatment of, and resource recovery from, faecal sludge in Vietnam. This project is funded by SECO (Switzerland's State Secretariat for Economic Affairs), and focused initially on the five provincial cities shown in Figure 8. The project duration is three to four years. To evaluate potential treatment options, separate studies are conducted to:

- understand the current state of sanitation in each of the five cities (this study),
- determine faecal sludge characteristics,
- assess the feasibility of digestion of faecal sludge,
- identify market demand for resource recovery from end-products of sludge treatment.



Figure 1: Location of the five cities initially involved in the PURR project

3. OBJECTIVES AND METHODS OF THE STUDY

The goal of the initial assessment study was to assess the influence of the physical, institutional and socioeconomic contexts on the production and characteristics of faecal and wastewater sludge. This background information is important to determine optimal sludge management strategies for urban areas in Vietnam.

A survey was conducted to understand the sanitation situation in the five cities, and assess the sludge production at the household level. Information was collected on:

- types of onsite sanitation technologies,
- operation and maintenance practices of these technologies,
- methods of emptying, and the frequency of faecal sludge collection.

Interviews were conducted with key local stakeholders to understand the regulatory and institutional framework for wastewater, solid waste and faecal sludge management, and the management practices for the collection, transport, treatment and disposal of these waste streams.

A systematic literature review was also carried out to understand the physical context (i.e. climate, geology, hydrology, topography), the socio-economic context and strategies and regulations at the national level for the management of these waste streams.

A market demand study will be conducted to complete the understanding of the local context. Based on the information gathered through these two studies, recommendations for the appropriate treatment and resource recovery options in the PURR project cities will be made.

3.1. Survey methodology

In-home interviews were conducted in 100 households in each of the five cities. Single households with 2 to 10 inhabitants in urban areas were selected. Five criteria were applied to select households that were surveyed:

- Location in relation to the area covered by the SECO and KfW projects (approx. 50 households within area, and 50 outside),
- Connection to sewer network (50 households connected, and 50 not connected),
- Type of street where the household is located (50 households on narrow lanes, and 50 in main streets)
- Type of building (40 individual or stand-alone houses, 40 multi-family households in adjacent arrangement, 20 villas situated in individual and separated terrains)

The proportion of households was selected to provide a broad overview of the sanitation system and be as representative as possible in each of the five cities. Therefore, the numbers had to be slightly adjusted for each city. Table 1 presents the breakdown of the number and types of houses, based on which the household were chosen for the surveys.

| | | Sewer c | onnection | No sewer connection | | |
|-----------------|---------------------|-------------|-------------|---------------------|-------------|--|
| | | Main street | Narrow lane | Main street | Narrow lane | |
| \/:II- | In project area | 3 | 2 | 3 | 2 | |
| Villa | Out of project area | 3 | 2 | 3 | 2 | |
| A alia a a sust | In project area | 5 | 5 | 5 | 5 | |
| Adjacent | Out of project area | 5 | 5 | 5 | 5 | |
| ا مینامانی ا | In project area | 5 | 5 | 5 | 5 | |
| Individual | Out of project area | 5 | 5 | 5 | 5 | |
| TOTAL | | 26 | 24 | 26 | 24 | |

Prior to the survey, the wards where the surveys were conducted were selected together with local stakeholders that had a good understanding of the local situation. These stakeholders were then involved in the survey to facilitate contact with the local population. The following stakeholders were involved:

- Bac Ninh Water Supply and Sewerage Company (WSSC),
- Son La Urban Environmental Company (URENCO) and local surveyors,
- Local surveyors in Hoa Binh,
- Lang Son Water Supply and Sewerage Company (LAWASE) and local surveyors,
- Ba Ria-Vung Tau Urban Sewerage and Development Company (BUSADCO).

Training was carried out by the survey team of HUCE prior to the surveys. Household surveys were carried out using the questionnaire form provided in Annex 2. They were carried out by teams of two people and took 25 minutes. The survey questionnaire contained four parts:

- general household information,
- type of onsite technology,
- emptying practices,
- evaluation of the faecal sludge management system.

3.2. Interview methodology

Semi-guided interviews were conducted with local ministries, wastewater and solid waste management utilities, and private companies providing faecal sludge emptying services. The managers of the companies were interviewed, together with employees from companies in the faecal sludge sector. As the role distribution for the management of wastewater, solid waste and faecal sludge is different in the five cities, a general list of questions was prepared, and the question were asked accordingly to the responsibilities of each interviewed stakeholder. Care was taken that all aspects were covered for each of the five cities.

Local waste management companies were contacted prior to the interviews and asked to send any documents that would be useful for answering the provided questions. This saved time during the interview, and provided a method to cross-check information. The questionnaire used for the interviews are provided in the Annex 4 and 5 together with the list of contacted people (Annex 3)

The questionnaire contained four sections:

- company activity, field of expertise, scope of activities, relation with the state,
- regulatory basis and organization of the company,
- existing infrastructure and management practices in relation to the company activities,
- sludge production, characteristics, and management methods.

4. NATIONAL BACKGROUND

4.1. Institutional framework

In the following sections, an overview of the main regulation and stakeholders involved in water and sanitation sectors are presented. Management systems are then separately presented for the water supply, drainage and wastewater, solid waste and faecal sludge sectors.

Information was collected on national laws and regulatory entities in the water and sanitation sector to understand the context? Indeed, laws and other regulatory texts define the type of management implemented, as well as the potential solutions.

The laws on water resources and on environment protection, respectively promulgated in 1998 and 1993 fix the basic principles concerning the water and sanitation sectors. Concerning the water supply and drainage in urban areas, several regulatory texts have been promulgated since 1998. The Decree 88 defines the basic principles concerning the investments and strategic development for the rainwater drainage and wastewater management. Decree 67, was promulgated in 2003 with the objective to limit the environmental pollution caused by wastewater. It fixes an environmental protection fee for sewage (i.e. < 10% of the water supply charge) that is already implemented by a large number of water supply companies (Le Duy et al., 2013). No text regulates the management of the sludge that is dredged from the sewers, produced in the wastewater treatment plants, or stored in the onsite sanitation systems. These are most often considered as solid wastes, and discharged in landfills despite their high water content.

4.2. Stakeholders organization

The main stakeholders in the water and sanitation sector and their roles are provided in Table 8. The National Government performs the national state management of all activities in the water and sanitation sector. The Ministry of Construction (MOC) and the Ministry of Agriculture and Rural Development (MARD) are in charge of promulgating and implementing national laws and strategies concerning the water and sanitation sectors, respectively in urban and rural areas.

This report focuses on the situation in urban areas of the five PURR project cities. These are all classified under grade 3 of the urban classification defined in Vietnam. They are all provincial centers. Annex 7 presents this classification and the criteria used for it.

At the district level, Provincial People's Committees (PC) organizes and develops water supply and sanitation services to fulfill the demands in their localities. They also participate in regional planning concerning the water and sanitation sector. The district agencies represent the local ministries (i.e. DOC, Department of Construction, and DONRE, Department of Natural Resources and Environment), and are in charge of the state management of water and sanitation sector activities in the province.

As shown in Table 2, the role distribution is not defined for the management of faecal sludge. The lack of regulation concerning the management of faecal, sewer and wastewater sludge results in low accountability feeling and willingness from the local authorities to implement efficient strategies. They also generally lack of dedicated means for faecal sludge management.

Table 2. Overview of the stakeholders

| Entity | Responsibility |
|--------------|--|
| National | - Performs the national State management of water supply, drainage and solid waste activities in Vietnam; |
| Government | - Defines the strategies in these sectors based on the recommendations of MOC and MARD; |
| | - Promulgates and directs the implementation of strategies and orientations for water supply, drainage and |
| | wastewater, and solid waste development, planning and management at the national level. |
| Ministry of | - Manages water supply, drainage and solid waste activities in urban and industrial zones nationwide; |
| Construction | - Studies and formulates strategies and policies on these sectors in urban and industrial zones nationwide |
| (MOC) | and submits them to the Government or Prime Minister for promulgation; |
| | - Organizes the implementation of programs and plans the development; |
| | - Promulgates the regulations, standards, economic or technical norms; |
| | - Guides, directs and inspects urban and industrial zones water supply, drainage and wastewater, and solid |
| | waste activities nationwide. |
| Ministry of | - Manages and monitors the quantity and quality of ground and surface water resources; |
| Natural | - Issues regulation concerning water resources and pollution at the national level. |
| Resource | - Controls the pollution related to drainage activities and wastewater discharge into water bodies; |
| and | - Promulgates the priority policies of land use in solid waste activities; |
| | - Coordinate with MOC to guide the rehabilitation land use modifications and environmental monitoring |
| (MONRE) | after landfill closure. |
| - | - Studies and formulates mechanisms and policies to encourage and mobilize domestic and foreign |
| Planning and | investment capital sources for water supply, drainage and wastewater, and solid waste works; |
| Investment | - Acts as coordinator in mobilizing official development assistance (ODA) capital sources for investment in |
| (MPI) | water supply, drainage and wastewater, and solid waste development in the order of priorities approved |
| | by the Prime Minister. |
| _ | - Performs the unified financial management of the ODA capital sources for investment in water and |
| Finance | sanitation sectors; |
| (MOF) | - Coordinates with MPI the balanced capital from state budget, the strategies and policies to encourage and |
| | mobilize domestic and foreign investment; |
| | - Coordinates with MOC and the MARD the principles and methods to determine clean water consumption |
| | and drainage prices, |
| | Promulgates the price regulation and organizes the examination and supervision of their implementation; Guides the implementation of the priority policies and the financial supports for private investment |
| | activities in the solid waste management sector. |
| Ministry of | |
| Health | - Manages community health nationwide;- Promulgates standards of drinking water quality and clean water. |
| (MOH) | Tromaigates standards of drinking water quanty and dean water. |
| Provincial | - Manage water supply, drainage and wastewater, and solid waste activities in geographical areas under |
| People's | their management; |
| Committees | Define functions and tasks of the stakeholders and decentralize the management of water supply, drainage |
| (PPC) | and solid waste activities to professional bodies. |
| / | The state of the s |

4.3. Water supply in urban areas of Vietnam

Uban water supply systems in Vietnam are under the responsibility of the National Government. Priority has been put on investments for infrastructures, both for upgrading and new construction, and as a result the supply of drinking water has been greatly improved.

In Vietnam, there are 68 water supply companies that supply drinking water to urban areas. They are public companies or operate under a contract with the local authorities. Surface water sources account for 70% of the total water supply and 30% is sullied from ground water. There are more than 420 water supply systems with a total designed capacity of 5.9 million m³/day. The operational capacity is 4.5 million m³/day, which is equal to 77% of the designed capacity (ADB, 2010 & MOC, 2009)

By 2010, 18.15 million people had access to drinking water, accounting for 69% of the total urban

population. The population with drinking water in urban areas of the same urban category than the 5 project cities is 45-55%. The average amount of water usage in urban areas is 80-90 L/person/d. In large cities such as Hanoi and Ho Chi Minh City, the consumption is 120-130 L/person/d (WHO & MOH, 2011). The current population with access to drinking water is still below the goals set by the national target program on urban water supply development.

4.4. Drainage and wastewater management in urban areas of Vietnam

This section presents the important features of the drainage and wastewater management, first focusing on sewer networks and their management, and then on the WWTP existing in Vietnam.

Many existing drainage networks in urban areas of Vietnam were constructed during the French colonial period. They have undergone significant disrepair, especially during the war, but in the past two decades significant repairs have been made since Vietnam has moved to a free economy. Urban drainage systems consist mostly of combined sewer networks that collect together rain water run-off and domestic wastewater. These include open channels, rivers, ponds and lakes, concrete sewers, and covered ditches. Most drainage systems in Vietnam are managed by publicly owned companies (e.g. Drainage Company, Water Supply and Sewerage Company or URENCO).

The service coverage of drainage and wastewater treatment is much lower than the coverage of drinking water supply (ADB, 2009). Sewer and drainage coverage at the national level is 40-50%, with a maximum average of 70% in large urban areas and only 10-20% in categories IV, V – urban areas.

The Decree 88 requires that each household has a septic tank. Domestic wastewater from households is pre-treated in septic tanks, where solids settle, a part of the organic matter is degraded, and the supernatant effluent goes to drainage channels, sewers, or to the environment. Many households are not connected to a sewer network due to a lack of tertiary networks that access households constructed on narrow roads or alleys (WHO & MOH, 2011). In these cases, wastewater flows into open ditches or leaches into the group. Some households do not have septic tanks and discharge their wastewater directly into the public sewer network. Many households have not had sludge removal from their septic tank for more than ten years. Therefore, the treatment is not effective, and the effluent is relatively high in solids, which sediment in sewerage systems and can be the source of odors during the dry season.

Following the drainage of effluent to sewers, for the most part wastewater then flows directly into water bodies (rivers, springs, lakes and seas) without treatment. There are only a few cities with operating wastewater treatment plants.

Eighteen WWTP are operated in Vietnam in 2013, out of which 12 are situated in Hanoi, Ho Chi Minh City and Danang, and the other are in Bac Giang, Quang Ninh, Buon Ma Thuot, Lam Dong and Bac Ninh (Le Duy et al., 2013). These WWTP were designed as A2O (Anaerobic-Anoxic-Oxic), SBR (Sequencing Batch Reactor) or stabilization pond. Fourteen of these treatment plants treat wastewater from combined sewer, which is characterized with very low BOD concentrations ranging from 34 to 101 mg/l. The cumulated design capacity of these treatment plants is estimated to 540,000 m³/day. In the current operational conditions, this probably allows the treatment of less than 10% of the domestic wastewater generated in urban areas of Vietnam.

Fees for wastewater collection and treatment in urban areas are already often collected by water companies. Commonly, 10% of the water supply fee is applied as an Environmental Protection Fee. This does not provide adequate funding to cover operation and maintenance costs for wastewater infrastructures. There are a lack of policies and appropriate models (e.g. public and private partnerships) to mobilize resources other than the state budget and development loans. Other

financial flows throughout the sector need to be generated to reduce the financial burden from the government and increase the coverage and quality of services (WHO & MOH, 2011).

Public companies that implement the operation, maintenance, and repair of the sewers are also in charge of dredging it, and maintaining pumping stations (Nguyen, 2009). Other responsibilities include pipeline construction, sewer pipe production, and collection of faecal sludge from septic tanks. Due to a lack of dredging equipment, desluging is mostly done manually. Hanoi and Ho Chi Minh have mechanical dredging equipment.

Vietnam's regulatory framework does not yet regulate the sewer or wastewater sludge collection, treatment, or disposal. These sludge are commonly not treated and dumped into landfills together with solid waste. Laws regulating solid wastes do also not address sewer and wastewater sludge. For example, the sludge produced in the wastewater treatment plants in Hanoi is discharged at Nam Son landfill.

4.5. Solid waste management in urban areas of Vietnam

URENCOs are assigned to collect solid waste from households, rubbish on the streets, parks, and office. The Vietnamese government stipulates that medical centers and industrial units are responsible for collection and implementation of the treatment of their solid waste. But, in fact, the regulation is not enforced. There is very little available data on solid waste collection and treatment from industrial production units and medical centers. Most industrial producers and medical centers sign contracts with local URENCOs to collect their solid waste. In some cases, hazardous wastes are mixed up with non-hazardous solid waste before URENCO come.

According to Nguyen et al., 2011, there are two common methods for the solid waste collection in Vietnam. In large streets and big cities, rubbish bins with a capacity of 100-200 liters are located at each side of the streets and small lanes, and residents bring their waste to the bins. Pedi-carts are used to collect rubbish from the bins and transport it to temporary solid waste storage sites at the end of each road. Compactor trucks with a 6-12m3 capacity are used to collect rubbish from bins and temporary storage sites and transport it to transfer stations. In Hanoi, there are three solid waste transfer stations. From the transfer stations, rubbish is compacted, loaded into trucks with the capacity of 18-32m3 and transported to landfills.

In narrow lines and small cities, handcarts are used to collect rubbish. Workers push the handcarts and use bells to alert residents to bring rubbish stored in plastic bags. When the handcart is full, it is taken to temporary waste storage sites at the beginnings of lanes. Workers continue to collect rubbish in other lanes. During the night, compactor trucks with the capacity of 6-12m3 come to temporary storage sites to transport rubbish to landfills.

There is no law enforcing the implementation and operation of sanitary landfills in urban areas of Vietnam. Therefore, a large part of domestic solid wastes are discharged in non-sanitary dumping sites. The responsibility of implementing and distributing the responsibilities for the management of a landfill is attributed to PC. Currently, collection, transport and management of wastes on lakes, canals and rivers are not under the responsibility of any organization.

4.6. Faecal sludge management

Faecal sludge characteristics and volume are depending on the local and institutional context, and wastewater management organization presented above. These values may greatly vary from city to city. This section presents a rapid overview of general faecal sludge management practices in urban areas of Vietnam.

Households pay service providers to empty their septic tanks at a frequency reaching ten years

(Nguyen et al., 2011). Most households only empty their septic tanks if they become blocked and overflow. One reason for very infrequent emptying is the emptying price, and another reason is that the septic tanks are frequently not accessible. They are often built underneath the house, and the floor needs to be broken to access them. The result is that solids in the effluent are high as sludge overpasses the designed storage height, and is washed out with supernatant.

A mix of state-owned, Joint stock companies (i.e. where state owns 50% of the shares) and private companies provide faecal sludge collection and transport services. Although this is illegal, and due to a lack of treatment infrastructure, service providers usually dispose of faecal sludge in drains, aquaculture, waterways or open areas. Several URENCOs provide services for both faecal sludge and solid waste collection and transport. Therefore, they commonly dispose of faecal sludge in landfills without any cost. As an example, every year, amounts of faecal sludge from septic tanks in Hanoi, Hai Phong, HCM Cities are estimated to 189,000; 80,500 and 336,000 m³ respectively (Nguyen et al., 2013). Most of it is discharged without control in the environment.

In the regulatory framework of Vietnam, no distinction is made between faecal sludge, sewer sludge and wastewater sludge. These wastes are not addressed by any regulatory text. In practice, they are most commonly considered and managed as solid wastes. Therefore, no city of Vietnam provides a satisfactory example of faecal sludge management. Even though there are no legal discharge sites, faecal sludge collection and transport operators in urban areas are generally required to obtain a business license to open and run a business.

People in rural areas widely apply untreated faecal sludge as a fertilizer, and there is a good potential for enduse of faecal sludge in Vietnam (AECOM & SANDEC, 2010). Indeed, it is common that emptying companies discharge faecal sludge in agriculture fields or aquaculture ponds. The Ministry of Health is currently drafting guidelines for composting human excreta into reusable fertilizer, based on the World Health Organization's 2006 "Volume 4: Excreta and Grey Water Use in Agriculture" of the "Guidelines for the Safe Use of Wastewater, Excreta, and Grey Water".

In Hanoi, faecal sludge from public toilets that are operated by URENCO is currently discharged in a pond. Faecal sludge emptied by private companies is mostly discharged in drains and open areas in the city. In Hai Phong, a treatment plant built by the World Bank was designed to dry and compost faecal sludge and sewer sludge. In Da Nang, faecal sludge is discharged in a settling tank, from which the settled sludge is then pumped to a landfill. In Ho Chi Minh city, faecal sludge is dried and sold as compost by a private company. In Da Lat and Buon Ma Thuot, faecal sludge is co-treated with the wastewater at the WWTP. In Ba Ria, a private company operates a faecal sludge treatment plant under the principle of Upflow Anaerobic Sludge Blanket (the private company did not share information about this plant).

Due to the lack of regulatory framework and strategy for faecal sludge management, local governments have no incentive to promote faecal sludge management. They invest scarce resources in operating the few existing treatment facilities, or to support such projects once ODA project funding ends (AECOM & SANDEC, 2010). Therefore, simple technologies should be chosen for the treatment of faecal sludge, with a preference for technologies allowing energy autonomy.

5. RESULTS OF THE SURVEYS AND INTERVIEWS

From the results obtained during the surveys on 100 households in 5 cities, a comparison on different factors that may influence the volume produced, and characterisation of faecal sludge is presented below. The complete data resulting from the survey and interview is available on demand. The number of surveyed households does not allow providing a statistically representative picture of the situation in the five cities. However, it allows a good overview of situations that are encountered. Three main conclusions can be drawn:

- There are overall tendencies that are common to the five cities, where most of the
 population living in the different areas surveyed use similar water supply and wastewater
 management infrastructures, but the household sanitation systems and practices still vary in
 a same city;
- Each city shows a different organizations and practices, and therefore requires specific assessment to define adequate sludge management options.

5.1. Environmental and economic context

The five project cities present different physical environment that are summarized in Table 3.

Table 3. Summary of environmental conditions of the five cities

| | Son La | Ba Ria | Hoa Binh | Bac Ninh | Lang Son |
|----------------------------------|------------------|----------------|-------------|------------|------------------|
| Geographic situation | 300km northwest | 90km southeast | 75km west | 30km | 150km northeast |
| | from Hanoi, near | from Ho Chi | from Hanoi | northeast | from Hanoi, near |
| | Chinese border | Minh City | | of Hanoi | Chinese border |
| Topography | Mountainous | Flat | Mountainous | Flat | Mountainous |
| Altitude (m above sea level) | 590-650 | 3-14 | 17-25 | 3-7 | 255-260 |
| Temperature(°C) (min, mean, max) | 10; 21; 30 | 23; 27; 33 | 20; 23; 27 | 16; 23; 29 | 12; 20; 28 |
| Average annual rainfall (mm) | 1,400 | 1,350 | 1,850 | 1,500 | 1,400 |

A summary of socio-economic conditions of the five cities is given in Table 4. All of the 5 cities are experiencing rapid industrialization and urbanization, and a significant movement from agricultural to industrial and construction sectors. Hoa Binh and Son La have a similar economic distribution of agriculture, forestry and fishery sectors accounting for approximately 15% of their GDP, services and commerce 50%, and industrial sector 35%. Ba Ria differs from the other cities with a higher contribution from industry and construction sectors to their GDP of 62%. In Lang Son, the main contribution to GDP is commercial services and tourism.

Table 4. Summary of socio-economic conditions of the five cities

| | Son La | Ba Ria | Hoa Binh | Bac Ninh | Lang Son |
|--------------------------------|-----------|-----------|----------|-----------|-----------|
| Urban population (inhabitants) | 66,515 | 69,293 | 70,859 | 92,118 | 140,459 |
| Total district population | 107,282 | 98,990 | | 153,530 | 187,278 |
| (inhabitants) | (in 2012) | (In 2009) | 90,920 | (in 2010) | (in 2009) |
| Area (km2) | 325 | 91 | 144 | 83 | 79 |
| Density (pers/km²) | 330 | 1,082 | 630 | 1,858 | 2,371 |
| Income (USD/pers.year) | 920 | 3,785 | 845 | 3,155 | 1,130 |
| Economic growth rate (%) | 17 | 22 | 14 | 16 | 11 |

5.2. Wastewater management in the five project cities

In each of the 5 cities, the combined drainage system in residential neighbourhood catchments are typically constructed as flat-bottomed, rectangular covered channels, having little slope. Excepted in Ba Ria, and in the newly constructed network in Bac Ninh, open joints are frequent, that allow significant inflow and infiltration with typically high groundwater levels. The old drainage networks in Son La, Lang Son, Hoa Binh and Bac Ninh were initially designed for rainwater runoff (drainage) from city streets and public areas, not as combined sewerage systems. However, at present due to rapid urban growth, they are also used to transport wastewater. Currently, only Bac Ninh city has a WWTP, the wastewater in other cities is discharged directly to rivers without treatment.

The wastewater infrastructures are presented below, and Table 5 shows the responsibilities distribution for water supply, wastewater, solid waste and faecal sludge for the five project cities. For

the three cities in the "Wastewater and Solid Waste Management – Program North II" of KfW, the wastewater sludge treatment will be designed with cold digestion, thickening and dewatering to 40% dryness (Lahmeyer, IGIP, ICC, ANVIET, 2013; Pöyry, 2008a, 2008b, 2009).

- Bac Ninh: The sewer network was extended, and a WWTP was constructed under KfW funding in the framework of the "Wastewater and Solid Waste Management Program North I". The WWTP is in operation since July 2013, with a design capacity of 17,500m³/d. The WWTP includes primary and secondary biological treatment. No wastewater sludge treatment is being performed yet, as sludge is not produced. The combined drainage and sewer network includes networks that existed prior to the KfW project and sewers that were constructed as part of the project.
- Son La: Under phase II of the KfW project, a separate sewer will be built, together with a WWTP with primary treatment through settling tank and secondary biological treatment through activated sludge. The existing sewer network is in bad conditions, and cannot be extended within the project. The design capacity as planned in the feasibility study is 6,860 m³/d. These infrastructures are in the phase of final design. The existing combined drainage and sewer network is of poor quality.
- Hoa Binh: Under the phase II of KfW project, the existing combined sewer will be extended, as it is partly in good conditions. A wastewater treatment, including a direct treatment of wastewater in activated sludge basins at high load will be built. The design capacity as planned in the feasibility study is 5,120 m³/d. These infrastructures are in the phase of final design. The existing combined drainage and sewer network is of poor quality.
- Lang Son: Under the phase II of KfW project, the existing combined sewer will be extended, as it is partly in good conditions. A wastewater treatment, including a direct treatment of wastewater in activated sludge basins at high load will be built. These infrastructures are in the phase of final design. The design capacity as planned in the feasibility study is 5,260 m³/day. The existing combined drainage and sewer network is of poor quality.
- **Ba Ria:** A combined drainage and sewer network was built in the 1990s, which will be enhanced and extended as part of the SECO project. The new sewer network is planned as separate sewer. The wastewater treatment plant is still under final design. A long basin with aerobic and anaerobic zones is planned to treat 12,000m³/day. The wastewater sludge will be stabilized by aeration, thickened, centrifuged, and dewatered through lime addition to reach a dryness content of 30%.

Table 5. Stakeholders in charge of the water supply, wastewater, solid wastes, and faecal sludge management in the five project cities

| Management responsibility | Son La | Ba Ria | Hoa Binh | Bac Ninh | Lang Son |
|---------------------------|----------------------------|--|-------------------------------|--------------------|--------------------------|
| Water supply | Son La Water Supply JSC | Ba Ria – Vung Tau Water supply company | Hoa Binh Water supply company | Bac Ninh WSSC | LAWASE |
| Wastewater | | BUSADCO | Hoa Binh | | |
| Solid waste | Son La Urenco | URENCO Ba Ria | URENCO | Bac Ninh URENCO | Huy Hoang Ltd company |
| | | | Hoa Binh | Bac Ninh | Huy Hoang Ltd |
| | Son La Urenco | BUSADCO | URENCO | URENCO + 4 | company |
| Faecal sludge | + 3 companies | + 6 companies | + 1 company | companies | + 3 companies |

5.3. Sewer and wastewater sludge management in the five project cities

At present, there is no legal framework concerning the sewer and wastewater sludge management in the five project cities. Therefore, very few information are recorded and available. The companies managing the sewer are also in charge of its maintenance under their contract with the local PC. Therefore, the portion and frequency of dredged sewer depends on the budget accorded by PC.

URENCO Hoa Binh and BUSADCO in Ba Ria are responsible for dredging the sewer of the primary, secondary and tertiary networks. In Bac Ninh, Son La and Lang Son, the local communities are in charge of dredging the tertiary network, and local URENCO or Wastewater companies are responsible only for the primary and secondary sewer network.

Where the company is not operating the landfill or the treatment plant, a fee is paid for the discharge of the sewer sludge. This is the case for the cities of Bac Ninh and Ba Ria. More information on the sewer sludge management is given in Table 6. Values provided in this table are rough estimates, as most companies do not keep records on the sludge management. More sludge can be expected where open drains are common (i.e., Bac Ninh, Son La, Lang Son, Hoa Binh). The length of the sewer network also influence the quantity of sludge accumulated.

Table 6. Sewer sludge management agencies in 5 cities

| | Bac Ninh | Son La | Lang Son | Hoa Binh | Ba Ria |
|-----------------|---------------|----------------|----------------|-------------------|-------------------|
| Company in | Bac Ninh | URENCO | LAWASE | URENCO | BUSADCO – Ba |
| charge of sewer | WSSC | | | | Ria Drainage |
| maintenance | | | | | company |
| Dredging | 1 time/year | 3 times/year | 2-3 times/year | no information | No information |
| frequency | for sewer and | | | | recorded |
| | 4 times/year | | | | |
| | for manhole | | | | |
| Volume of sewer | 20,000 | no information | 40,000 m3/year | 100 tons/year | 4,534 m3/year |
| sludge dredged | m3/year | | | | |
| Disposal site | dumped in the | discharged to | dumped in km | dumped in old | dumped in Cong |
| | Dong Ngo | Son La URENCO | No 10 in Quang | landfill situated | Trang landfill, |
| | landfill | garden and | Lac commune, | 5 km in the | located about 7- |
| | | reuse as | landfill | north of the | 8 km in the |
| | | fertilizer | operated by | city | North of the city |
| | | | LAWASE | | |

5.4. Solid waste management in the five project cities

The management of solid waste is not the focus of this report. However, as sludge is currently being disposed in landfills together with the municipal solid waste, some basic information are given below concerning the landfills in the five cities.

- **Bac Ninh.** A sanitary landfill is under construction. Currently a temporary unlined landfill receives all types of solid wastes until the new one is opened.
- **Son La.** A sanitary landfill is under construction that will include a composting plant for the municipal organic wastes. Currently an unlined landfill is in used until the new one is opened.
- **Hoa Binh.** A new sanitary landfill was constructed, but is not yet in operation. Until it is open a non-sanitary and unlined landfill is in use for all the solid wastes collected in the city.
- Lang Son. Municipal solid waste is transported to a transfer station, from where it is transported to a landfill operated by Huy Hoang Ltd company.
- Ba Ria. Municipal solid wastes are currently discharged in a landfill that is operated by Ba Ria
 Urenco. A new sanitary landfill and composting plant are under construction. The local PC
 and DOC have a project where all types of waste will be treated separately. Both private and
 public companies are encouraged to build treatment plants on this site.

5.5. Basic information on households and water provision

The number of users for each toilet has a significant impact on the appropriate volume of septic tank and the rate of faecal sludge accumulation. The number of residents per household/toilet on a percentage basis is reported in Figure 2.

% 80
60
40
20
40
Son La City
Hoa Binh City
Lang Son City
Ba Ria City
Ba Ria City

Figure 2: Number of persons per household on a percentage basis in the 5 cities

The volume of water coming into a household also has a significant impact on faecal sludge volumes and characteristics. This is especially important if greywater (i.e. wastewater from kitchen, shower and other cleaning purposes) is discharged in the onsite system together with blackwater (i.e. wastewater from toilets). Over the five cities, about 90% of the households discharge only blackwater in their onsite system. Therefore, the overall consumption in water is really influential for only 10% of the surveyed households.

Another important influence of the water supply on the characteristics of faecal sludge is the use of flush or dry toilets. In general, households having direct access to a good water supply more likely have flush toilets, and therefore produce more diluted and watery faecal sludge.

As shown in Figure 3, an average of 95% of households in this survey were connected to a piped drinking water network, with a minimum percentage of 94 in Lang Son and Bac Ninh, and a maximum percentage of 100 in Son La. The surveyed households, which were not connected to the water supply network all used drilled well or surface water for water provision.

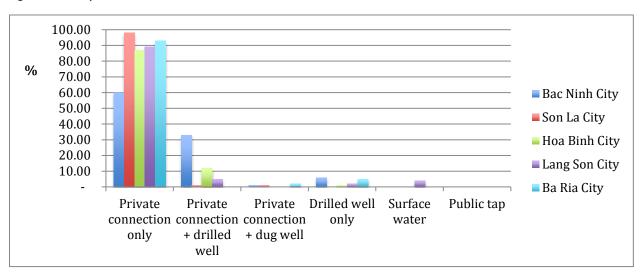


Figure 3: Water provision in 5 cities

5.6. Household sanitation systems

Flush toilets connected to septic tanks are the most common type of sanitation technology used by the surveyed households. They were utilized by 98% of surveyed households in Bac Ninh, 100% in Ba Ria, 95% in Son La, 95% in Lang Son, and 94% in Hoa Binh. These high percentages confirm the

importance of implementing adequate and environmental-friendly faecal sludge management systems in the five cities concerned.

Mechanical emptying is recommended in these cities, as the sludge from septic tank is generally easily pumped. At the opposite, pit latrine sludge is more compacted, and often require other emptying means. A very low percentage of surveyed household were equipped with pit latrines, only in Son La and Lang Son.

The percentage of household discharging the septic tank supernatant in soak pit or open areas varies between 44% in Lang Son, and 2% in Bac Ninh. This represents non-negligible environmental risks, which should be reduced thanks to the different programs implemented by KfW and SECO. 2% of interviewed households in Bac Ninh and Lang Son have no toilet and practice open defecation due to limited budget. The results of the surveyed households in each city are provided in Table 7.

| Table 7. Types of user interface, onsite containment technology and connections to sewer for each of the 5 | cities. |
|--|---------|
|--|---------|

| Category | % household | | | | |
|--|-------------|--------|--------|----------|----------|
| | Bac Ninh | Ba Ria | Son La | Lang Son | Hoa Binh |
| Flush toilet + septic tank + sewer | 96 | 86 | 78 | 51 | 75 |
| Flush toilet + septic tank + soak pit/open discharge | 2 | 9 | 16 | 44 | 25 |
| Flush toilet+ sewer | 0 | 0 | 2 | 0 | 0 |
| Flush toilet + open discharge | 0 | 0 | 1 | 0 | 0 |
| Pit latrine | 0 | 0 | 2 | 3 | 0 |
| Composting toilet | 0 | 5 | 1 | 0 | 0 |
| No toilet | 2 | 0 | 0 | 2 | 0 |
| Total | 100 | 100 | 100 | 100 | 100 |

The results obtained during the survey of 100 households in the five cities are very similar to the information that was collected through surveys within the KfW project. The baseline survey "Incorporating Knowledge – Attitude – Practice and Customer Satisfaction" carried out by CEPAC within KfW project areas reported the following results (CEPAC and GFA, 2009, 2012, 2012):

- Bac Ninh. 97% of interviewed households owned a toilet, and 95% of them used flush toilets connected to a septic tank. Some households in peri-urban wards utilized pit latrines or ventilated improved pit latrines.
- Son La. 97% of interviewed households owned a toilet, out of which 75% were connected to the combined drainage sewerage network.
- Lang Son. 93% of interviewed households owned a toilet, out of which 52% were connected to combined drainage sewerage network.

The comparison between the results of this study and the survey conducted by the local Health Offices in Hoa Bin and Ba Ria shows more differences (values collected during the interviews). This is probably due to the fact that these surveys were conducted at a larger scale, and also included periurban areas, which were not concerned in this survey. The studies conducted by the local Health Offices reported the following results:

- Hoa Binh. 52% of interviewed households used a flush toilet connected to a septic tank; 10% relied on pit latrines; 4% on composting toilets, 4 % on VIP toilets, and 29% had no sanitation system, and practice open defecation.
- Ba Ria. 85% of interviewed households used a flush toilet connected to a septic tank; and 15% used pour flush pit latrines.

In general, septic tanks are built at the same time the house is constructed. As shown in Figure 4, in Bac Ninh, 47% of surveyed households having a septic tank stated that it was built less than 5 years ago. In Son La, Hoa Binh, Ba Ria and Lang Son cities, the highest percentage of surveyed household

stated that their septic tank was built 5 to 10 years ago. The number of septic tank that were built more than 20 years ago in the surveyed households was very low in all the cities, and null in Bac Ninh. These numbers are consistent with the recent development of these cities.

Figure 4: Age of septic tanks in 5 cities

Among the surveyed households having a septic tank, in Bac Ninh, Son La, Hoa Binh, Lang Son and Ba Ria, the percentage were people remember the number of chamber of their septic tank is 97, 94, 89, 94, and 91, respectively. The number of chamber influences the settling capacity of the septic tank, and therefore can influence the characteristics of faecal sludge (e.g. solid concentration). As shown in Figure 5, more than 75% of the households have septic tanks with three chambers in Bac Ninh, Son La and Lang Son. In Ba Ria, about 60% have two chambers, and 35% three chamber. In Hoa Binh, approximately half of the households had septic tanks with two chambers, and the other half had three chambers. One-chamber septic tanks mostly exist in old houses and 4-chamber tanks are used in new houses where additional treatment is preferred.

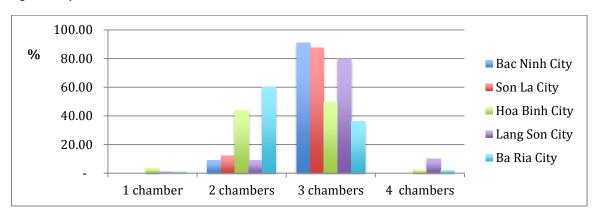


Figure 5: Septic tanks' chambers in 5 cities

Another important variable for sludge accumulation is the volume of a septic tank, which depends on the number of users and the available space for construction. The information available on the volume of the septic tank in the surveyed households is less reliable for the cities of Hoa Binh and Ba Ria, as only 46 and 24 households remembered this information, respectively. For the other cities, similar percentage of households surveyed knew the volume than the number of chamber. The size of the septic tank has a strong influence on the emptying frequency, as most often, household wait until the tank is full. This influence the volume of faecal sludge that need to be managed over the years, but also its characteristics, as microorganisms have more time to degrade the organic compounds in larger tanks.

The reported volumes for septic tanks are shown in Figure 6. Small septic tanks of less than 3m³ can be found in more than 25% of the household owning septic tanks in Son La, Hoa Binh and Lang Son.

In Bac Ninh about half of the households own septic tanks between 3 and 5 m^3 , and the other half has bigger tanks. In Ba Ria the volume of the septic tanks is bigger than 3 m^3 in more than 90% of surveyed households.

100.00
% 80.00
60.00
40.00
20.00

Son La City
Hoa Binh City
Lang Son City
Ba Ria City
Ba Ria City

Figure 6: Septic tanks' volume in 5 cities

5.7. Household emptying practices

The percentage of surveyed households that emptied their systems, including the age of the septic tank, is reported in Figure 14. Among surveyed households, very high percentage did never empty their septic tank, accounting for 81%, 86%, 80%, 89%, in Bac Ninh, Son La, Hoa Binh, and Lang Son, respectively. In Ba Ria 39% of surveyer household having a septic tank did never empty it. This can be explained as most of the septic tanks (73%) were built less than ten years ago, when the mean estimated emptying frequency reaches 10 years.

In general, only a small part of the septic tanks that were built less than 5 years ago has been emptied. In Ba Ria, about 27% of these were emptied. In all other cities, this percentage is less than 10%. The emptying rate for onsite systems of 5 to 10 years is also better in Ba Ria, with 41% of the systems of this age which were emptied. In average, 25% of the onsite systems having between 10 and 20 years were emptied. In Figure 7, the emptying rate of Ba Ria is presented as 100%, this is due to the fact that no surveyed household had septic tank over 20 years.

As more than 70% of the households have a septic tank that was built less than ten years ago, it is expected that more and more faecal sludge will be emptied the coming 5 to 10 years, when these will fill up. This emphasize the urgent need to find solutions for the management of faecal sludge in the five cities of the project, as well as in other cities presenting similar situation.

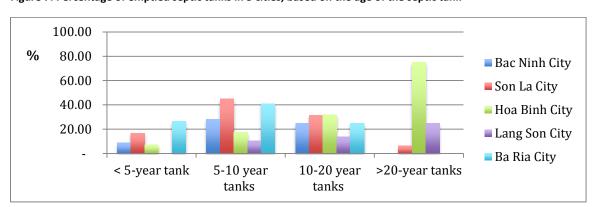


Figure 7: Percentage of emptied septic tanks in 5 cities, based on the age of the septic tank

5.8. Faecal sludge collection and treatment

200,000

In the 5 studied provinces, DOCs are the main responsible for faecal sludge management. Based on DOC's recommendations, provincial PC takes decisions on faecal sludge related issues. However, faecal sludge is still not considered as a priority by local authorities.

Faecal sludge collection and transport services are an open market, and the public and private sector compete based on customer demand. The price of faecal sludge emptying is not fixed, and is negotiated between emptiers and households. A summary of the emptying companies and the price range applied in the five cities provided in Table 8.

| | Bac Ninh | Son La | Hoa Binh | Lang Son | Ba Ria |
|--------------------------------|-----------|-----------|-----------|----------------------|---------------------------|
| Public emptying company | URENCO | URENCO | URENCO | 1 | BUSADCO |
| Private emptying company | 4 groups | 3 groups | 1 group | Huy Hoang + 3 groups | Dai Nam + (4-5) groups |
| Emptying price | 200 000 - | 150 000 - | 300 000 - | 150 000 - | 200 000 - |

400,000

200,000

300,000

Table 8: Faecal sludge emptying companies and price in 5 cities

300,000

(VND/m³)

In all of the five cities, private companies discharge the faecal sludge contained in their trucks in agriculture (e.g. rubber tree or coffee plantations, or familial farmland). In Bac Ninh and Hoa Binh, private emptiers interviewed also stated they discharge faecal sludge in aquaculture ponds. Based on the MARD Decision 04/2007-QG, this is illegal, as waste products issued from animal or human should not be used as amendment for the growth of vegetables (Le Duy et al., 2013). However, this seems a very common and well accepted practice. In general, farmers do not pay for faecal sludge and trucks discharge it on their land for no cost.

Ba Ria is currently the only city were a faecal sludge treatment plant exists that accept faecal sludge province-wide. Dai Nam Company constructed and operates it, with a current capacity of 100-120 m³/d. The faecal sludge collected by the 6-8 companies during the day is transported to a large emptying truck of 12 m³, which transports the sludge to the upflow anaerobic sludge blanket reactor operated by Dai Nam. The sludge from household septic tank is discharged for free at Dai Nam treatment plant, but sludge from commercial activities is received with a fee of 40,000 VND/m³. No information on the way to distinguish these two types of faecal sludge was found.

In Son La, faecal sludge collected by Son La Urenco is transported to a small pre-treatment unit, consisting of a small settling tank with followed by a gravel filter. It is planned that the endproducts are then used in aquaculture and for tree plantations.

6. CONCLUSIONS ON THE SELECTION OF TREATMENT STRATEGIES FOR THE 5 CITIES

The importance of urgently finding solutions for the management of faecal sludge for urban areas of Vietnam is confirmed by the field and literature studies conducted for this initial assessment study. Significant quantities of faecal sludge, which is a very concentrated waste, are currently discharged into the environment daily, with considerable impacts on public and environmental health.

It can be concluded that based on the current reality in Vietnam, providing wastewater networks and treatment plants will not be sufficient to address the sanitation challenge. Each time a household empties their septic tank, even with very low frequency, it directly offsets benefits realized by sewer networks if it is discharged directly to the environment. Hence, this is a major challenge that needs to be addressed. In addition, wastewater treatment plants do not reach design influent loadings since

the majority of solids are retained at the household level in the form of faecal sludge. Therefore, the sanitary challenge of Vietnam will not be answered without dual management of wastewater and faecal sludge management at the household level. Two possibilities for management include:

- Use and build upon the existing infrastructure addressing faecal sludge and wastewater management in parallel. Most households have septic tanks, and stakeholders for collection and transport of faecal sludge already exist in Vietnamese cities. If this was coordinated and organized, faecal sludge treatment plants could be built. As solids are settled out in septic tanks, future treatment infrastructures could include simplified or condominal sewers instead of conventional sewer networks, which are easier and much less expensive to construct, and provide for separate management of surface waters. Wastewater treatment plant sludge and faecal sludge could be co-managed and treated to optimize efficiency and resource recovery.
- As sewer networks are constructed, septic tanks could be bypassed. However, this solution
 would be much more expensive, complicated and labor intensive, as it would require
 replumbing each individual household to connect to the sewer network. This would also
 need a change in national legislation, strong enforcement and the necessary financial means
 for adaption at the household level, in addition to the construction of sewers. This significant
 change in infrastructure would probably require a transition period of decades.

Regardless of proposed future solutions, a solution is urgently needed for the present day management of faecal sludge in the five cities, and for at least the next 10 to 20 years.

6.1. Factors influencing the selection of treatment technologies

Following are conclusions regarding the main factors that influence the production, characteristics and potential management options for sludge based on the Initial Assessment Study. This information is important for developing solutions for a faecal sludge management system, be it short- or long-term. Conclusions are summarized below, and recommendations in Table 9 (Bassan et al., 2014). It is important to highlight that further studies are required prior to implementation for the required level of detail to ensure the feasibility and adequacy of these options.

5.1.1. Influence of institutional and stakeholder organization

Sludge management is not effectively addressed by local authorities and there is no existing regulatory framework that addresses the management of faecal sludge produced by septic tanks, even though septic tanks are required by Decree 88. There is also a lack of legal sites for disposal or treatment of faecal sludge. In the current situation, most private companies that collect and transport faecal sludge are providing public services illegally, as there is nowhere for them to legally discharge faecal sludge.

Recommendations concerning the institutional and stakeholder organization: Implementation of national standards for the regulation and enforcement of environmentally safe collection, transport, treatment, and resource recovery or enduse of all types of sludge are urgently needed. Sewer, wastewater and faecal sludge should be clearly distinguished, and clear responsibilities should be distributed to local authorities for each of them. Ideally emptying of septic tanks should occur on a regular basis (e.g. 5 years), with treatment facilities located in each city at distances that are reasonable for transportation.

5.1.2. Influence of the local context

Raw information concerning the environmental context and infrastructures available need to be considered with the practices and habits when designing strategies for sludge management. For example the size and number of inhabitant is expected to influences the production of faecal and

wastewater sludge produced. Lang Son and Bac Ninh are the more populated cities of the PURR project, and, higher faecal sludge production could be expected. However, households surveyed in Lang Son revealed a high percentage of septic tanks that were never emptied.

Recommendations concerning the local context: The selection of wastewater and faecal sludge solutions should be based on the local context and practices. For example in Son La where faecal sludge treatment exists, it could be extended, and/or the planned composting plant could be used to co-compost municipal solid waste and sludge. In Ba Ria transport of faecal sludge to the existing faecal sludge treatment plant could be promoted. The co-treatment of faecal and wastewater sludge at the future or existing WWTP could be a possibility in each of the five cities.

5.1.3. Influence of water supply, drainage and wastewater systems

Most households in the survey had flush toilets connected to septic tanks. The rapidly increasing populations together with the KfW and SECO drainage and wastewater projects that will connect households to sewers, will result in increasing volumes of sludge being produced in the coming years. The disposal of watery sludge in landfill is not a recommended option. The landfills in each of the cities are either non-lined, at overcapacity, or far outside of the city boundaries. Transport of sludge over long distances is expensive, and discharge in the environment does not provide adequate protection of public health.

Recommendations concerning the water supply, drainage and wastewater management systems: It will be beneficial to have a plan for sludge management taking into account the sludge production after the sewer extension and the WWTP construction. Adequate treatment and safe disposal or resource recovery are needed to provide adequate protection of human and environmental health. This would involve a more detailed assessment of the sludge produced by the sewer and WWTP.

5.1.4. Influence of the existing faecal sludge infrastructures and practices

Faecal sludge collection and transport appears to be a profitable business, as between 1 to 5 private companies are already operating in each city, together with publicly owned companies. This also illustrates that significant volumes of faecal sludge are being produced and collected. This production is expected to increase with the average age of septic tanks and increasing urbanization.

Resource recovery from faecal sludge has a long history of use and acceptance in Vietnam, suggesting that resource recovery in agronomic and industrial settings should be accepted. Currently untreated faecal sludge is used in agriculture in each city, which is not recommended. In general, households empty their septic tanks at the end of the lunar year which needs to be considered in the design of treatment options.

Recommendations concerning faecal sludge management systems: Sludge should be treated for pathogen reduction or used in areas where risk to human health is low (e.g. forestry). As faecal sludge is produced all over the year, but at variable volumes, co-treatment with other wastes streams could provide a good solution to balance volumes. Increased monitoring of faecal sludge emptying and patterns is required. It would provide more accurate estimates for faecal sludge production. This information together with the characterization study that is being conducted within the PURR project, would provide means to more accurately design sludge management technologies.

Table 9: Recommendations based on collected information for the selection of faecal sludge management systems (from Bassan et al., 2014)

| ASPECT | General recommendation Technology selection |
|-------------------------------|---|
| Wastewater infrastructures | Landfilling sludge should be avoided Existing treatment plants should be utilized All: co-treatment of faecal sludge and wastewater sludge Son La: co-composting of dewatered sludge with solid wastes also possible |
| Faecal sludge infrastructures | Mechanical transport should be optimized Centralized to semi-centralized treatment is possible All: treatment option needs to be designed for partly stabilized faecal sludge Ba Ria: transport to existing faecal sludge treatment plant Son La: upgrade of existing treatment plant also possible |
| Regulatory framework | Co-treatment of faecal sludge and wastewater sludge Regulation should enable resource-recovery of treatment end-products Co-treatment of faecal sludge and a control of treatment to allow for coherent technological solutions |
| Stakeholder organization | Centralized treatment is recommended with optimization of role distribution, including private companies - All: the same stakeholder should be in charge of management of faecal sludge and wastewater sludge - Son La, Hoa Binh: co-treatment by URENCO |
| Management practices in city | • Financial mechanisms are required for operation of treatment plants and products to offset treatment costs |
| Age and frequency emptying | • Solutions are needed to upgrade septic tanks over 5-10 years - All: Faecal sludge treatment plants should be built within five years |
| Resource recovery | • Resource recovery is well accepted and should be promoted - All: treatment technology should produce valuable and safe to use end-products, which can generate revenue |

7. REFERENCES

ADB (2009). Report of Water Sector Assessment in Vietnam.

ADB (2010). Assessment Report on Strategy, Roadmap of Water Supply and Sanitation in Vietnam. **AECOM and Sandec (2010).** A Rapid Assessment of Septage Management in Asia: Policies and Practices in India, Indonesia, Malaysia, the Philippines, Sri Lanka, Thailand, and Vietnam. ECO-Asia. USAID: Regional Development Mission for Asia (RDMA).

CEPAC and GFA (2009). Report on Community Baseline Survey: Incorporating Knowledge – Attitude – Practice & Customer Satisfaction (Bac Ninh City – Bac Ninh Province) Available from: http://www.wastewater-vietnam.org/en/publications/programme-publications.html

CEPAC and GFA (2012). Report on Community Baseline Survey: Incorporating Knowledge - Attitude - Practice & Customer Satisfaction (Hoa Binh City - Hoa Binh Province) Available from: http://www.wastewater-vietnam.org/en/publications/programme-publications.html

CEPAC and GFA (2012). Report on Community Baseline Survey: Incorporating Knowledge - Attitude - Practice & Customer Satisfaction (Son La City – Son La Province) Available from: http://www.wastewater-vietnam.org/en/publications/programme-publications.html

CEPAC and GFA (2012). Report on Community Baseline Survey: Incorporating Knowledge - Attitude - Practice & Customer Satisfaction (Lang Son City – Lang Son Province). Available from: http://www.wastewater-vietnam.org/en/publications/programme-publications.html

GKW CONSULT, COLENCO, ICC (2005). Design Report for Bac Ninh City. Final version. Wastewater and Solids wastes management project. KfW fund. Vietnam

Lahmeyer GKW Consult, IGIP, ICC, ANVIET, 2013. Improvement of waste water and solid waste management in provincial centers – Programme North II-Inception report-Phase: Final design and tendering.

Le Duy Hung, Nguyen Viet Anh, Keaton R, Corning J. 2013. Vietnam urban wastewater review. The World Bank.

Nguyen Viet Anh (2009). Sustainable Urban Sewerage and Drainage. Journal of Construction (ISSN 0866 – 8762). #10/2009. 32-37 pp. (in Vietnamese).

Nguyen Viet Anh, Nguyen Hong Sam, Dinh Dang Hai, Nguyen Phuoc Dan, Nguyen Xuan Thanh (2011). Landscape Analysis and Business Model Assessment in Faecal Sludge Management: Extraction and Transportation Models in Vietnam. Final Report. IESE and Bill & Melinda Gates Foundation.

Pöyry and ICC, (2008). Feasibility Study – Vietnam Program North II – Waste Water Management in Lang Son – Phase: Feasibility Study Report.

Pöyry and ICC, (2009). Feasibility Study – Vietnam Program North II – Waste Water Management in Son La – Phase: Feasibility Study Report.

Pöyry and ICC, (2008). Feasibility Study – Vietnam Program North II – Waste Water Management in Hoa Binh – Phase: Feasibility Study Report.

SFC UMWELTECHNICK GMBH (2011). Design and Built Report of Wastewater Treatment Plant in Bac Ninh City

VIWASE (2009). Feasibility Study on Ba Ria Town Wastewater collection and Treatment Project **Vietnam Institute of Architecture, Urban and Rural Planning (VIAP) (2013).** Solid wastes Master Plan of Ba Ria Vung Tau province at horizon 2025 and towards 2030, Vietnam.

WHO and MOH (2011). Water and Sanitation sector assessment report Vietnam.

Bassan Magalie, Dao Nguyet, Nguyen Viet Anh, Holliger Christof, Strande Linda (2014). Technologies for sanitation: how to determine appropriate sludge treatment strategies in Vietnam. Refereed paper presented at the 37th WEDC International Conference, Hanoi, Vietnam.

Webpages

- 1. Vietnam Ministry of Construction Official website: www.moc.gov.vn.
- 2. Vietnam Government website: Administrative Map: http://gis.chinhphu.vn/
- 3. Bac Ninh Provincial People Committee Offical website: http://www.bacninh.gov.vn/;
- 4. Bac Ninh Radio and Television Station website: http://bacninhtv.vn/
- 5. http://vi.wikipedia.org/wiki/;
- 6. Son La Provincial People Committee Offical website: http://www.sonla.gov.vn/
- 7. Hoa Binh Province People Committee Offical website: http://www.hoabinh.gov.vn/;
- 8. Hoa Binh City People Committee Offical website: http://ubndtp.hoabinh.gov.vn/
- 9. Hoa Binh Department of Industry and Trade website: http://www.socongthuonghoabinh.gov.vn/
- 10. Lang Son Provincial People Committee Offical website: http://www.langson.gov.vn/
- 11. Ba Ria-Vung Tau Provincial People Committee Offical website: http://www.baria-vungtau.gov.vn/web/guest
- 12. Ba Ria-Vung Tau City People Committee Offical website http://baria.baria-vungtau.gov.vn

Annex 1: Questionnaire for the household survey

| Interviewer: | Date: | Time: | Group: | | | |
|--|--------------------|--------------------------|------------------------------|------------------|--|--|
| City | | | | | | |
| | Interview No: | | | | | |
| | et | | | | | |
| Type of building (number of | stories, number | of household in t | he same house,): | | | |
| Ward | | | | | | |
| Comments on interview (ob | | | | | | |
| We are from comp | | | | • | | |
| management in our city. The | • | • | • | • | | |
| wastewater and faecal slud | _ | | | | | |
| households is. We would like | | | | | | |
| Your information will be use Could we start the interview | • | irpose only and v | viii not be shared out of tr | ie research team | | |
| Could we start the interview | 7: | | | | | |
| | RT 1: GENERAL IN | IFORMATION ON | THE HOUSEHOLD | | | |
| 1- Full name: | | | | | | |
| 2- Is the interviewed | _ | ehold? | | | | |
| Yes | 1 🗖 | | | | | |
| No | 2 🗖 | | | | | |
| 3- Status of househol | d leader | | | | | |
| Owner | 1 🗖 | | | | | |
| Tenant | 2 🗖 | _ | | | | |
| Other | 3□ | | | | | |
| 4- Number of person | _ | cession : | | | | |
| Total: | | | | | | |
| 5- Main occupation o | | eader | | | | |
| Civil servant | 1 🗖 | | | | | |
| Trader | 2 🗖 | | | | | |
| Farmer | 3□ | | | | | |
| No activity | 4 🗖 | 0 15 | | | | |
| Other | 5□ | | | | | |
| 6- Source of water su | apply (can be seve | | TE CHART) | | | |
| Private connection | | 10 | | | | |
| Public tap | | 2 🗖 | | | | |
| Dug well | | 3 🗖 | | | | |
| Drilled well | | 4 □ 5 □ | | | | |
| Surface water Other | | 5 □ 6 □ | | | | |
| | NI DOW DON MON | - | WND | | | |
| | | | VNĐ | | | |
| | | | use (specify if differe | nt sources)? | | |
| | or (| · · | | | | |
| 9- How much does yo | | | | | | |
| | | ANITATION TECH | NOLOGY | | | |
| 10- What kind of sanit | | | | | | |
| Flush toilet, directly | | | 1 | | | |
| Flush toilet + septic tank, connected to sewer | | | 2□ | | | |

| Flush toilet + septic tank + soak pit or o | pen dis | charge | ; | 3 🗖 | 4 |
|---|------------|------------|-------------|-----------|------------------------|
| VIP Latrine | | | | | 5 |
| Composting toilet (1 or 2 vaults) | | | | | 6 □ |
| No mix / urine separation toilet (1 or 2 | vaults) | | | 7 | ~ _ |
| Other (Specify) | radics, | | | 80 | |
| No toilet | | | | _ | 9□ |
| In case there is no toilet: what is the habit | (shared. | . open s | pace, pub | lic toile | |
| If no toilet, go to question 28. | (| , - | , p | | ., , . |
| 11- Wastewater received in septic tank (| sanitatio | on facili | tv) is fron | ı (can b | e several of them): |
| Toilet | | 1 | • | • | , |
| Bathing, washing, cleaning | | 3 | | | |
| Other | | 4 □ | | | |
| 12- Do you throw other materials in the | pit / tan | | solid wast | es, oil, | chemicals, manure,) or |
| do you add chemicals to improve deg | gradatio | n in it? | | | |
| Yes | 1 | If ves, | please spe | ecify | |
| No | 2 | , , | | , | |
| 13- When did you build the septic tank? | | | | | |
| < 5 years | 1 | | | | |
| 5 – 10 years | 2 | | | | |
| 10 – 20 years | 3□ | | | | |
| > 20 years | 4 | | | | |
| 14- Information on the onsite sanitation | system | (septic | tank or ot | her): | |
| Volume: (m³) | | | | | |
| Chamber: (chamber) | | | | | |
| Other characteristics: | | | | | |
| How easy accessible is it for emptying | ; : | | | | |
| Need to break the floor for assess | | | | 1 | |
| In the Kitchen | | | | | |
| In the bathroom | | | | | |
| Elsewhere: | | | | | |
| Easy access through manhole, cap cove | r or othe | er | ; | 2 🗖 | |
| Other, please specify: | | | | 3 🗖 | |
| PART 3: | EMPTYII | NG PRA | CTICE | | |
| 15- Did you already empty your pit? Whe | en last ti | me? | | | |
| Yes | 1 | If yes, | when? | | |
| No | 2 | | | | |
| 16- When the pit is full, what do you do? |) | | | | |
| I empty immediately | 1 | | | | |
| I empty if I have money 2□ | | | | | |
| I empty if I have support | 3□ | | | | |
| I close the pit | 4 | | | | |
| Other | 5 | Specify | y: | | |
| 17- What kind of emptying service do yo | u use? | | | | |
| Manual | 1 | | | | |
| Mechanical | | 2 | | | |
| Other | | 3□ | Specify:. | | |
| 18- If manual emptying is used, who doe | s it? | | | | |
| Family member | 1 | | | | |
| Manual emptier | | 2 | | | |
| • | | | | | |

| | Other | | | 3□ | Specify: | |
|------------|------------------------|--------------------------------|------------|-------------|-----------------------------------|--------|
| | 19- If mechanica | al emptying is used, wha | at kind o | f compa | ny do you choose? | |
| | Public | | | 1 | | |
| | Private | | | 2 | | |
| | Company nan | ne, telephone (if any): | | | | |
| | Reason: | | | | | |
| | Type of contra | act / relationship with t | hem: | | | |
| | 20- Distance fro | m emptying trunk to th | e tank: . | (m) | | |
| | 21- How much d | lo you pay for the service | ce? | | | |
| | | . (VNĐ) for manual emp | | | | |
| | | (VNĐ) for mechanical | | g (truck). | | |
| | | emptying frequency? | | 5 (0. 0.0). | | |
| | Twice a year | | 1 | | | |
| | Once a year | | 2 | | | |
| | < 5 years/time | Δ | 3 □ | | | |
| | 5 - 10 years/ti | | 4 | | | |
| | Other | iiiic | 5 | Specify | y: | |
| | | meone else reuse the s | | Specify | y · ····· | |
| | | 1 | iuuge: | | | |
| | Yes | 2 | | | | |
| | No 24 If yes who is | ∠⊔ s reusing it? Do you pay | / aat na | sid for it? | . | |
| | | | | alu ioi it: | | |
| | | get paid for it? | | | <u>.</u> | |
| | Yes | | 1 🗖 | If yes, | how much / how? | |
| | No | | 2 🗖 | | | |
| | | aecal sludge reused, in | • | | | |
| <u>Wha</u> | t is the treatmen | t process, if any? | | | | |
| | | | | /IPROVE | | |
| | 27- Where do lic | quid effluents after sept | ic tank ខ្ | get disch | arged? | |
| | Drainage cha | nnel | | | 1 🗖 | |
| | River, lake, ca | ınal | | | 2 🗖 | |
| | Open space | | | | 3□ | |
| | Other | | | | 4□ | |
| | | | | | | |
| | 28- Where do ot | ther type of wastewate | r (cleanii | ng/wash | ing/bathing,) get discharged? | |
| | Drainage cha | nnel | | | 1 🗖 | |
| | River, lake, ca | ınal | | | 2 🗖 | |
| | Open space | | | | 3□ | |
| | Other | | | | 4 🗖 | |
| | | | | | | |
| | 29- Do you care | where your faecal slud | ge broug | ght to? | | |
| | Yes | 1□ | | | | |
| | No | 2 🗖 | | | | |
| | 30- How much a | re you willing to add up | to the | current p | payment for emptying service to i | mprove |
| | the situation | n? VNĐ | | | | |
| | 31- Would vou a | ccept that sludge from | vour fac | ility is tr | eated and marketed? | |
| | Yes | 1 □ | , | ., | | |
| | | | | | | |
| | No | 2 🗖 | | | | |
| | | | | | | |

Thank you for your support!

Annex 2: List of persons contacted during the study

| N | | | |
|----|------------------------|--|---|
| 0 | Name | Organization | Position |
| 1 | Friedrich Lantzberg | Lahmeyer GKW Consultants | Project Director |
| 2 | Mr Đinh Quang Hiệp | Bac Ninh WSSC | President, Director |
| 3 | Mr Nguyễn Xuân Quyết | Bac Ninh WSSC | Manager of Bac Ninh Sewerage Entreprise, WSSC |
| 4 | Mr Nguyen VanThái | Bac Ninh WSSC | Assistant WSSC, PMU officer |
| 5 | Mr Chu Thanh Hai | DOC Bac Ninh | Head of Infrastructure Management Office |
| 6 | Mr Cảnh | URENCO Bac Ninh | Vice Director |
| 7 | Mr Nguyễn Trường Giang | URENCO Bac Ninh | PMU officer |
| 8 | Mr Hung | URENCO Bac Ninh | Faecal sludge Emptying Worker |
| 9 | Mr Tua | Faecal sludge Emptying group | Faecal sludge Emptying Worker |
| 10 | Trần Mạnh Hồng | URENCO Son La | President, Director PMU |
| 11 | Mr Thanh | URENCO Son La | Vice Director PMU |
| 12 | Mr Toàn | URENCO Son La | Officer PMU |
| 13 | Mr Nguyen Duc Tuan | URENCO Son La | Head of Planning Office |
| 14 | Mr Ky | URENCO Son La | Faecal sludge Emptying Worker |
| 15 | Mrs Hang | DONRE Son La | Environmental Resources Office |
| 16 | Mr Lam | DOC Son La | Infrastructure Management Office |
| 17 | Mr Cuong | Faecal sludge Emptying group in Son La | Faecal sludge Emptying Worker |
| 18 | Mr Lê Văn Liên | Hoa Binh PC | Vice President, Director PMU |
| 19 | Mr Hùng | Hoà Bình PC | Vice Director of PMU |
| 20 | Mr Chung | Hoà Bình PC | PMU officer |
| 21 | Mrs Trang | Hoà Bình PC | Infrastructure Management Office |
| 22 | Ms Trang | Hoà Bình PC | Health Office |
| 23 | Mr Trần Khắc Định | Hoa Binh URENCO | Director |
| 24 | Mr Tua | Hoa Binh URENCO | Faecal sludge Emptying Worker |
| 25 | Mr Hung | Faecal sludge Emptying group | Faecal sludge Emptying Worker |
| 26 | Mr Nguyễn Hữu Chung | LAWASE | Director |
| 27 | Mr Quyết | LAWASE | Deputy Technical Director, Vice Director PMU |
| 28 | Mr Tuấn | LAWASE | Technical Officer |
| 29 | Mr Phong | LAWASE | Technical Officer |
| 30 | Mr Luu | DOC Lang Son | Infrastructure Management Office |
| 31 | Mr Đinh Trọng Cảnh | Huy Hoang Company in Lang Son | Director |
| 32 | Mr Nguyen Phuc Hai | BUSADCO | Head of Technical Office |
| 33 | Mr Nguyen Xuan Bang | BUSADCO | Technical Office |
| 34 | Mr Trong | BUSADCO | Faecal sludge Emptying Worker |
| 35 | Mr Dung | DONRE Ba Ria | Pollution Control Office |
| 36 | Mr Nguyen Trong Thuy | DOC Ba Ria | Head of Infrastructure Management Office |
| 37 | Mr Hai | Dai Nam Emptying group in Ba Ria | Director |
| 38 | Mr Hung | Le Gia Nhu Emptying group in Ba Ria | Faecal sludge Emptying Worker |
| 39 | Mr Nam | Tan Thanh Emptying group in Ba Ria | Faecal sludge Emptying Worker |

Annex 3: Questionnaire for the interview of local authorities

| erviewer: Date: |
|--|
| mments on interview (observation, visits, other person, place to see, other remarks): |
| General information: |
| Full name of interviewed person: |
| Position / Organization: |
| Contact of interviewed person: |
| Responsibilities: |
| PART 1: SOCIO-ECONOMIC CONTEXT OF THE CITY |
| Population distribution per administrative division. Population forecast to horizon 2020 and |
| 2025. |
| Please indicate on the city map the different areas (new city/old |
| city/residential/commercial/industrial/administrative areas; connected/non connected to sewer |
| network areas) or provide the city land use map . |
| Main economic activities and their shares to GDP of the city? Please indicate the most important |
| occupations in each areas. |
| 4-1.Agriculture–Forestry-Aquaculture: |
| 4-2.Industry–Construction: |
| 4-3.Services: |
| Orientation of economic development in the city. What will be the focused domain? Are there |
| |

- any document presenting the strategy in this field? Is it possible to obtain it?
- 6- If available, is it possible to get a list of the hotel, restaurants, administrative buildings and hospital of the city?

PART 2: STATE MANAGEMENT ON WATER SUPPLY AND SANITATION

| | | Water Supply | Water drainage | Solid wastes | Feacal sludge |
|-----|--|--------------|----------------|--------------|---------------|
| 7- | Functions/duties of your agency on the domain? | | | | |
| 8- | Legal framework at national and local level applied on the domain?(Please provide local legal framework, if any) | | | | |
| 9- | Annual state subsidy for the domain? | | | | |
| 10- | Do you know any public and private companies providing service on the domain? | | | | |
| 11- | Are there other stakeholders involved in the management (collection, transport, treatment, resource recovery, disposal)? Please describe their roles | | | | |
| 12- | What are the contract-types of the companies? (contract, bidding,) | | | | |
| 13- | Scope of service of the company? | | | | |
| 14- | Do you know any project related to the domain implementing in the city? | | | | |
| 15- | Main challenges and difficulties in the management of the domain? Also related to the population development, land uses, and geographical features (slope, rivers,). | | | | |
| 16- | To improve the management of the domain in the future, would you have any idea or opinion? | | | | |

PART 3: EXISTING INFRASTRUCTURE OF THE CITY

| 17- | Please describe the existing infrastructure of water supply: | | | | | |
|-----|---|--|--|--|--|--|
| | 17-1. Water sources: | | | | | |
| | 17-2. Capacity: | | | | | |
| | 17-3. Percentage or number of serviced households | | | | | |
| 18- | Please describe the existing infrastructure of wastewater and drainage: | | | | | |
| | 18-1. Estimated volume of wastewater generated in the city (m³/day): | | | | | |
| | 18-2. Estimated wastewater origin? | | | | | |
| | % domestic | | | | | |
| | % service (governmental administration and offices) | | | | | |
| | % commerce, hotels and restaurants | | | | | |
| | % industry | | | | | |
| | % hospital % other (specify) | | | | | |
| | 18-3. Collected wastewater:(m³/day) or% | | | | | |
| | 18-4. Characteristics of sewer system: | | | | | |
| | Combine/separate: | | | | | |
| | Year of construction: | | | | | |
| | Remarks on design or construction: | | | | | |
| | | | | | | |
| | Difficulties in the management and operation of the infrastructures? 18-5. Percentage of household connected to network? | | | | | |
| | | | | | | |
| | | | | | | |
| 40 | Per district / area: Per district / area: Per district / a | | | | | |
| 19- | Please describe the existing situation of solid waste collection, transport and treatment: | | | | | |
| | 19-1. Estimated volume of solid waste generated in the city (tonnes/day | | | | | |
| | 10.2 Ovinin of colid worksol | | | | | |
| | 19-2. Origin of solid wastes? | | | | | |
| | % domestic% industry% hospital% others 19-3. Collected volume :(tonnes/day) or% | | | | | |
| | 19-4. Discharged sites and their capacity? (Please indicate on the map) | | | | | |
| | 19-5. Is solid waste reused? If yes, please specify treatment method, capacity and products? | | | | | |
| 20- | Do your agency (or other related agencies) investigate the toilet facilities at households in the city | | | | | |
| 20- | If yes, please provide the data. | | | | | |
| | Flush toilet, directly connected to sewer (households) or(%) | | | | | |
| | Flush toilet + Septic tank, connected to sewer (households) or(%) | | | | | |
| | Flush toilet + Septic tank + open space (households) or(%) | | | | | |
| | Pit (dry) toilet (= traditional latrine) (households) or(%) | | | | | |
| | Other (specify) (households) or(%) | | | | | |
| | No toilet (households) or(%) | | | | | |
| | n case there is no toilet: what is the habit (shared, open space) ? | | | | | |
| | Data could be extrapolated from investigation. Please provide data sources) | | | | | |
| 21- | Please describe the existing situation of collection, transport and treatment of feacal sludge: | | | | | |
| | 21-1. Estimated volume of feacal sludge generated in the city (tonnes/day): | | | | | |
| | 21-2. Collected volume: | | | | | |
| | 21-3. How is feacal sludge emptied? | | | | | |
| | How is feacal sludge treated? | | | | | |

- 21-4. Is feacal sludge reused? If yes, please specify treatment methods and capacity, products?
- 22- In your opinion, is uncontrolled feacal sludge a pollution in the city? If yes, what should be done to improve the situation?
- 23- Do you know any evidence of environmental pollution and disease transmission due to uncontrolled feacal sludge? If yes, what should be done to improve the situation?

PART 4: DATA AND REPORTS TO BE COLLECTED

- Environmental Status Report (if any)
- Socio-economic development reports in 3 recent years (if any)
- Report on socio-economic development planning (if any)
- Planning on urban infrastructure development, water supply and drainage, solid waste management (if any)

Thank you for your support!

Annex 4: Questionnaire for interview of wastewater and solid waste companies

| Interviewer: Date: |
|--|
| Comments on interview (observation, visits, other person, place to see, other remarks): |
| INTERVIEW TO SEWERAGE AND URENCO COMPANIES |
| Company name: |
| Telephone:Fax: E-mail:Web-site: |
| Full name of interviewed person: |
| Responsibilities: |
| OBJECTIVES OF THE INTERVIEW: |
| To understand the company's activities in the fields of wastewater drainage and/or collection/transport/treatment of solid waste and feacal sludge; |
| To understand the state management and current infrastructures related to the above-mentioned fields |
| To understand the status and practices in the fields of wastewater drainage and/or collection/transport/treatment of solid waste and feacal sludge in the city |
| SCOPE OF THE STUDY: |
| In the urban area |
| |
| PART 1: GENERAL INFORMATION ON THE COMPANY |
| 1. Company category: |
| 1.1. One member State limited liability company: |
| 1.2. Private limited liability company: |
| 1.3. Joint stock company: |
| 1.4. Other: |
| 2. General information of company: |
| 2.1. Organization chart (Please provide with paper) |

| | Drainage (Collection/transport/treatment/reu se of rainwater, wastewater and sewer sludge dredging) | Solid wastes (Collection/transport/discharge /treatment/reuse) | Feacal sludge (Collection/transport/dischar ge/treatment/reuse) |
|---|---|--|---|
| 2.2. Activities AND scope of service | | | |
| 2.3. Contract-type with the government, the population, and the private and public companies: (contract, bidding,) | | | |
| 2.4. Financial indicators in the last 3 years: total income, income per activity, and financial support (with source) (Please provide with paper) | | | |
| 2.5. Cost norm (VNĐ/m3 and VNĐ/tonnes) for : Collection, Transport Treatment Resource recovery discharge | | | |
| 2.6. Is there different costs for: Households Private companies and buildings Public buildings | | | |

PART 2: INFORMATION ON STATE MANAGEMENT

| 3. | Legal framework at national and local level applied to the company's activities (including management and operation & maintenance, environmental protection, public health) (Please provide local legal framework, if any) | Drainage (Collection/transport/treatment/reuse of rainwater, wastewater and sewer sludge dredging) | Solid wastes (collection/transport/discharge/ treatment/reuse) | Feacal sludge (collection/transport/disc harge/treatment/reuse) |
|----|---|--|--|---|
| 4. | Combien et contact if any other public and private companies with their capacity, acting on the city | | | |
| 5. | Do you have any recommendation to improve the management (in terms of infrastructure, geographical distribution, acceptation and participation by the population, collaboration with the other stakeholders, finances, staff)? | | | |
| 6. | Do you know any environmental and sanitation project implementing in the city? If yes, please provide some information on the projects (technical description, area, capacity, timeframe for design, building, operation, stakeholders involved.) | | | |

PART 3: COMPANY'S ACTIVITY ON DRAINAGE AND WASTEWATER SECTOR

| 7. Please describe the existing infrastructure | e of wastewate | r drainag | e (poss | ible to indicate of | on the |
|--|-------------------|-----------|------------------------|---------------------|--------|
| map) | | | | | |
| 7.1. Estimated volume of wastewater generat | ed in the city (m | n³/day): | | | |
| 7.2. Wastewater origin? | | | | | |
| % domestic | | | | | |
| % service (governmental adn | | offices) | | | |
| % commerce, hotels and rest | aurants | | | | |
| % industry | | | | | |
| % hospital% other (specify) | | | | | |
| 7.3. Collected wastewater:(m³/day) o | or% | | | | |
| 7.4. Design characteristics of sewer system (if | | | nt, plea | se specify, and sh | iow |
| on the map) : | | | | , ,, | |
| 7.4.1.Type of sewer: | a) combined | | b) Sepa | nrate \Box | |
| 7.4.2. With overflow chamber: | c) yes | | | d) no | |
| 7.4.3.Type of pipe: | e) close | ed pipe | | f) open channel | |
| 7.4.4.Year of construction: | | | | | |
| 7.4.5.Remarks on design or construction | on: | | | | |
| 7.4.6. Difficulties during operation that | relate to the slo | оре | | | |
| 7.4.7.Length of the sewer system: | | | | | |
| Primary: | | | | | |
| Secondary | | | | | |
| Tertiary | atuu ark? | | | | |
| 7.5. Percentage of household connected to ne Total: | etwork! | | | | |
| Per district / area (<i>Please indicate on t</i> | he man) | | | | |
| 7.6. Total amount of dredging sludge (sewer s | | or tonne | s/vear) | ? | |
| 7.7. Dredging methods (material, staff,) ? | 0 / (| | ,, , | | |
| 7.8. Dredging frequency and period? | | | | | |
| 7.9. Treatment and disposal mode and areas | ? | | | | |
| 8. After collected, wastewater is disposed at | | | | | |
| River, pond, other natural aquatic bod | y 1 □ | | | | |
| Drainage channel | 2□ | | | | |
| Open space | 3□ | | | | |
| Agricultural land (irrigation) | 4 □ | | | | |
| Other | • | ecify: | | | |
| 8.1. Is wastewater reused? If yes, please speci | ııy | | | | |
| 8.2. Type of resource recovery: | | | 1□ | | |
| Industry Irrigation in agriculture (fruits, vegetal | nles or trees) | | 1 2 | | |
| Green areas | ores or trees; | 2 | 2 □ 3□ | | |
| Other | 4□ Spe | ecify: | | | |
| 8.3. Type of treatment (if any) before reuse : | · | - | | | |
| DART A: GENERAL INCORMATION ON EACCAL | CLUDGE MANA | CENTENIT | INI CITY | | |

PART 4: GENERAL INFORMATION ON FAECAL SLUDGE MANAGEMENT IN CITY

| 9. Do you have information related to toilet facili | ties at households in the city? If yes, please |
|--|---|
| provide data: | |
| 9.1. Design characteristics of onsite systems (if severa | l areas are different, please specify, and show |
| on the map!) (please show pictures to describe th | ese): |
| Flush toilet, directly connected to sewer | (households) or(%) |
| Flush toilet + Septic tank, connected to sewer | (households) or(%) |
| Flush toilet + Septic tank + open space or soak pit | |
| pit (dry) toilet (= traditional latrine) | (households) or(%) |
| Other (specify) | (households) or(%) |
| No toilet | (households) or(%) |
| In case there is no toilet: what is the habit (shared | |
| (Data could be extrapolated from investigation. Pla 9.2. Access to toilet | ease provide data sources) |
| At household / building | (households) or(%) |
| Shared between several houses | (households) or(%) |
| No toilet | (households) or(%) |
| (Data could be extrapolated from investigation. Ple | • |
| 9.3. In your opinion, percentage of septic tanks receiv | ed wastewater from: |
| Toilet | % |
| Teller and broken and the start | 0/ |
| Toilet and bathing, washing, cleaning | |
| Other 9.4. Remarks on design or construction of onsite syste | |
| | enis (number of chamber, sealed / unsealed, |
| material used, robustness,): | |
| 9.5. Remarks on operation of onsite systems (type of | |
| maintenance habits, efficiency,): | |
| 10. Faecal sludge origin by type of building? | |
| % domestic | |
| % service (governmental administrat | ion and offices) |
| % commerce, hotels and restaurants | |
| % industry | |
| % hospital % other (specify) | |
| 11. Estimated volume of faecal sludge generated in th | e city (m³/day): |
| | |
| 12. After collecting, what is done with the feacal sludg | |
| 13. Does manual emptying exist / other methods for e | |
| | ny trucks do they have and their capacity (m3) |
| ? Name:(m³/c | • • |
| Name:(m³/da | |
| Name:(m³/da | |
| Name:(m³/da | |
| | |
| 15. In the amount of sludge collected by your compan | |
| Households: | (m³/day or year) (m³/day or year) |
| Residential building: Restaurants, services: | (m /day or year) (m³/day or year) |
| Public toilets : | (m²/day or year) |
| Other: | (m³/day or year) |
| 16. Data on average emptying volume and frequency | (, , , , |

| No | Category | Average emptying volume per onsite system (e.g. per septic tank), m ³ | Frequency (years/time) | | | |
|--|--|--|---------------------------|--|--|--|
| (1) | (2) | (3) | (4) | | | |
| 1 | Single households in urban areas | (-) | (-, | | | |
| 2 | Residential building (more than two | | | | | |
| | story and than one family) | | | | | |
| 3 | Single households in peri-urban areas | | | | | |
| 4 | Services (governmental administration, offices) | | | | | |
| 5 | Restaurants, hotels | | | | | |
| 6 | Commerce | | | | | |
| 7 | Industries | | | | | |
| 8 | Hopital | | | | | |
| 9 | Other | | | | | |
| | · | ne characteristics of the faecal sludge fro | | | | |
| | , , , | ank, pit latrine, public toilet) in terms of | color, viscosity, | | | |
| | solid materials, odors, etc? | | | | | |
| 18. a | and since when): | | | | | |
| Truck 1:Age:Specification of the pump: Truck 2:Age:Specification of the pump: Truck 3:Age:Specification of the pump: Truck 4:AgeSpecification of the pump: 18.1. Voyage per truck per day: | | | | | | |
| 18.2 | Min: | e of wastes (grease from restaurants, indu | istrial wastes, | | | |
| |): voyage/year or m³/year and tonne | s/year | | | | |
| 18.3 | . Number of days in service of trucks | per year:(days/year); | | | | |
| 19. Are there periods (days, weeks, months when emptying activity is greated / lesser? When? Why? | | | | | | |
| | After collected, faecal sludge is dispose | d at: | | | | |
| | River, pond, other natural aquatic b Drainage channel Open space Agricultural land (irrigation) Other | | | | | |
| 21. | Do you get paid or need to pay someon | · | | | | |
| | s faecal sludge reused? If yes, please sp | | | | | |
| 22.1 | , , , | , con y | | | | |
| 22.1 | Industry | 1 | | | | |
| | Irrigation in agriculture (fruits, vege Green areas | tables or trees) 2 3 | | | | |
| | Other | 4□ Specify: | | | | |
| 22.2 | 22.2. Quantity of faecal sludge reused (please, specify quantities for different type of enduse): (m³/day or year) or | | | | | |

22.3. Type of treatment (if any) before reuse (please specify treatment, design, quantities, contact of people involved, periods,...):

| PART 6: COMPANY'S ACTIVITY ON SOLID WASTE SECTOR | | | | | | |
|--|---|---|-------------|----------|--|--|
| 23. Ple | ase locate the existing in | frastructure of solid waste | in the map. | | | |
| 24. Ple | ase describe the existing | infrastructure of solid was | ste: | | | |
| 24.1. | 4.1. Estimated volume of solid waste generated in the city (m ³ /day): | | | | | |
| 24.2. | Solid waste origin by ty | oe of building? | | | | |
| 25 Δft | | service (governmental ad commerce, hotels and res industry hospital other (specify) | | offices) | | |
| 23. AII | Landfill sanitary 1 Dimple landfill Open space Other | capacity: | | | | |
| | - | /:eused? If yes, please speci | fv | | | |
| | Type of resource recover | | ıy | | | |
| | Industry Irrigation in agriculture Other | (fruits, vegetables or trees | | 10 | | |
| 26.2. | Quantity of solid waste | reused : | | | | |

PART 7: DATA AND REPORTS TO BE COLLECTED

- Annual summary report (2012)

26.3.

Report on existing and planning water supply and drainage infrastructures (if any)

.....(m³/day or year) or%

Documents on design of infrastructures (if any)

Type of treatment (if any) before reuse :

- Documents on organization of company
- Financial income and expenses
- Activity report on wastewater / drainage / solid waste / faecal sludge / sewer sludge management

Thank you for your support!

Annex 5: National regulations for urban water and sanitation in Vietnam

| Sector | Official decisions, decrees and laws |
|-----------------|---|
| General | - Law on Water Resource, promulgated on May 20, 1998; |
| laws | - Law on Environment Protection, promulgated in 1993 and revised on November 29, 2005. |
| Water supply | Decision No. 63/ 1998/ QD-TTg, dated on 18th March 1998, ratifying the orientation for the water supply development of urban areas and industrial zones up to the year 2020. In 2009, the government updated the development orientations for urban water supply by the Decision No. 1929/2009/ QD-TTg dated on 20th November 209 describes the orientations for development of water supply in Vietnam's urban centers and industrial zones up to 2025 and a vision toward 2025; Decree No. 117/ 2007/ ND-CP of 11th July 2007 on clean water production, supply and consumption, covers activities in the domains of production, supply and consumption of clean water under concentrated water supply systems in urban areas, rural areas, industrial zones, export processing zones, hi-tech parks and economic zones. The decree No 124/2011 ND-CP dated December 28, 2011 to amend and update the Decree No 117/2007/ND-CP on production, supply and consumption of drinking water was timely issued; Decision No. 16/ QD-BXD dated 31st December 2008 issued by Ministry of Construction (MoC) on issue Regulations on Water Supply Safety. |
| Water drainage | Decision No.35/ 1999/ QD-TTg, dated on 5th March 1999, ratifying the orientation for the urban drainage and sanitation development up to the year 2020. In 2009, the government also updated the development orientations for urban water drainage by the Decision No 1930/QD-TTg dated November 20, 2009, in which there was description of development orientations of drainage sector (urban drainage and wastewater) in urban areas and industrial parks up to 2025 and a vision to 2050; Decree No.88/ 2007/ ND-Cp of 28th May 2007, on urban and industrial zones water drainage provides for water drainage activities in urban centers and industrial zones, economic zones, export processing zones, hi-tech parks. The decree regulates the drainage investment and development, and defines the responsibility in public management in regard to drainage activities from planning to investment, management, and operation to fee collection, inspection and fining defenders. The decree also stipulates rights and obligations of organizations, individuals and households to take part in drainage activities. For rural residential areas, if possible, the decree also encourages the construction of centralized drainage systems. The decree is being reviewed and updated to be more appropriate to the actual situation; Decree No. 67/2003/NĐ-CP dated June 13, 2003 issued by the government on the fee of environmental protection for wastewater and the Decree No 04/2007/NĐ-CP dated on January 8, 2007 on revision and amendment of several articles of the Decree No 67/2003/NĐ-CP. |
| Solid waste | Decision No 59/2007/ND-CP, dated on April 9, 2007, issues by Government, on the solid waste management and Circular No 13/2007/TT-BXD, dated 31/12/2007, on the detail guidance of several articles in decision No 59/2007/ND-CP; Decision No 2038/QĐ-TTg, dated on November 15, 2011, issues by the Prime Minister, on the approval of the General Project for Healthcare Waste Management in the period of 2011 – 2015 and orientation to the year 2020. |

Annex 6: Classification of urban centers in Vietnam

| Grade | Socio-economic functions | Total population | Population density (person/km ²) | Non- agricultural labor force |
|---------------|---|--|---|-------------------------------------|
| Special grade | Capital or national center | > 5,000,000 | > 15,000 | > 90% |
| Grade 1 | National centerInter-provincial center | > 1,000,000 ¹ > 500,000 ² | > 12,000 ¹ > 10,000 ² | > 85% |
| Grade 2 | Provincial centerInter-provincial center | > 800,000 ¹ > 300,000 ² | > 10,000 ¹ > 8,000 ² | > 80% |
| Grade 3 | Provincial centerInter-provincial center | > 150,000 | > 6,000 | > 75% |
| Grade 4 | Intra-province reginal or provincial center | > 50,000 | > 4,000 | > 70% |
| Grade 5 | District or inter-communal center | > 4,000 | > 2,000 | > 65% |

(Source: Decree 49/2009/ND-CP)

The regulations concerning the urban water sector are different from that for rural areas, this report focuses on urban areas. There are several types of urban areas in Vietnam, as defined at the end of 2011 by the MoC Vietnam has 753 urban areas that are classified as follows:

- 2 special urban areas that are Hanoi and Ho Chi Minh City
- 3 central cities classified in category I urban areas, including Hai Phong, Da Nang and Can Tho; 8 provincial cities classified in categories I urban areas, including Hue, Da Lat, Nha Trang, Quy Nhon, Buon Ma Thuot, Thai Nguyen and Nam Dinh.
- 11 provincial cities are classified in category II urban areas, including Bien Hoa, Ha Long, Vung Tau, Viet Tri, Hai Duong, Thanh Hoa, My Tho, Long Xuyen, Pleiku, Phan Thiet and Ca Mau.
- 47 urban areas are categories III that are a town or a provincial city, the five selected cities in the project are in categories III.
- 42 urban areas are categories IV that are towns or township, townlets 640 urban areas are categories V that are townlets

¹ City under Central government authority

² City under Provincial government authority